

Converter guidelines
July 2025 edition



Commercial
Vehicles

Converter guidelines The Multivan

(from model year 2022)



Table of contents

1 General information	6
1.1 Introduction	6
1.1.1 Concept of this Owner's Manual	6
1.1.2 Means of representation	7
1.1.3 Vehicle safety	8
1.1.4 Operational safety	9
1.1.5 Note on copyright	9
1.2 General information	10
1.2.1 Product and vehicle information for converters	10
1.2.1.1 Contact in Germany	10
1.2.1.2 International contact	10
1.2.1.3 Electronic repair and workshop information from Volkswagen AG (erWin*)	10
1.2.1.4 Genuine Parts Online Ordering Portal*	11
1.2.1.5 Online Owner's Manual	11
1.2.1.6 European Type Approval (ETA) and EC Certificate of Conformity (CoC)	11
1.2.1.7 Worldwide Harmonized Light-Duty Vehicles Test Procedure (WLTP)	11
1.2.1.8 Amendments to legislation from 1 January 2022 Regulation (EU) 2018/858 EU and national (Art. 44 and Art. 45)	12
1.2.1.9 Manufacturer's declaration	12
1.2.2 Converter guidelines, consulting	13
1.2.2.1 Letter of non-objection	13
1.2.2.2 Application for the letter of non-objection	15
1.2.2.3 Legal entitlements	16
1.2.3 Warranty and product liability of the converter	16
1.2.4 Ensuring traceability	17
1.2.5 Badges	17
1.2.5.1 Positions on rear of the vehicle	17
1.2.5.2 Appearance of whole vehicle	17
1.2.5.3 Non-Volkswagen trademarks	17
1.2.6 Recommendations for vehicle storage	17
1.2.7 Compliance with environmental rules and regulations	19
1.2.8 Recommendations for inspection, maintenance and repair	20
1.2.9 Accident prevention	20
1.2.10 Quality system	21
1.3 Planning bodies	22
1.3.1 Selecting the basic vehicle	22
1.3.2 Vehicle modifications	23
1.3.3 Vehicle acceptance	24
1.4 Special equipment	25
2 Technical data for planning	26
2.1 Basic vehicle	26
2.1.1 Vehicle dimensions	26
2.1.1.1 Multivan basic data	26
2.1.2 Ramp angle and breakover angle	29
2.2 Running gear	30
2.2.1 Permitted weights and kerb weights	30
2.2.2 Turning circle	31
2.2.3 Approved tyre sizes	31

2.2.4 Modifications to axles.....	31
2.2.5 Modifications to the steering system	31
2.2.6 Brake system and brake control system ESC*	32
2.2.6.1 General information	32
2.2.6.2 Routing additional lines along the brake hoses/brake lines.....	32
2.2.7 Modification of springs, suspension mounting, dampers.....	32
2.2.8 Wings and wheel housings.....	32
2.3 Body-in-white.....	33
2.3.1 Roof loads	33
2.3.1.1 Dynamic roof loads.....	33
2.3.1.2 Static roof loads	33
2.3.2 Modifications to the body-in-white.....	33
2.3.2.1 Bolted connections.....	33
2.3.2.2 Welding work.....	35
2.3.2.3 Welded connections	37
2.3.2.4 Selection of welding process.....	37
2.3.2.5 Resistance spot welding	38
2.3.2.6 Shielding gas plug welding.....	39
2.3.2.7 Tacking.....	40
2.3.2.8 Welding is not allowed	40
2.3.2.9 Corrosion protection after welding	40
2.3.2.10 Corrosion protection measures.....	40
2.3.2.11 Planning measures	41
2.3.2.12 Component design measures.....	42
2.3.2.13 Coating measures	42
2.3.2.14 Work on the vehicle.....	42
2.4 Interior	43
2.4.1 Modifications in the area of airbags.....	43
2.4.2 Modifications in the area of seats	43
2.4.2.1 Belt anchors	44
2.4.3 Forced ventilation vent.....	44
2.4.4 Acoustic insulation	44
2.4.5 eCall Emergency System	45
2.5 Electrics/electronics.....	46
2.5.1 Lighting	46
2.5.1.1 Vehicle lighting systems	46
2.5.1.2 Adjusting the headlights.....	48
2.5.1.3 Special lights	48
2.5.2 Electrical system	49
2.5.2.1 Electrical wiring/fuses	49
2.5.2.2 Additional circuits	50
2.5.2.3 Retrofitting electrical devices	51
2.5.2.4 Electromagnetic compatibility	52
2.5.2.5 Mobile communication systems	52
2.5.2.6 CAN bus	53
2.5.2.7 Current and signal take-off of vehicle electrical system potentials	54
2.5.3 Electrical interface for special vehicles	59
2.5.3.1 General information on the interface for special vehicles	59
2.5.3.2 Customer-specific functional control unit (CFCU)	60
2.5.4 Vehicle battery.....	63

2.5.5 Retrofitting of alternators.....	64
2.5.6 Driver assist systems.....	65
2.5.6.1 Parking aids.....	71
2.5.7 Earth points.....	74
2.6 Engine peripherals/drive train	75
2.6.1 Engine / drive train components.....	75
2.6.2 Drive shafts	75
2.6.3 Fuel system	76
2.6.4 Exhaust system.....	77
2.6.4.1 Exhaust system (MAR*)	78
2.6.5 SCR system (EU6).....	81
2.6.5.1 Installation position of the AdBlue® tank in the vehicle	81
2.6.5.2 Filling opening of the AdBlue tank	82
2.7 Add-ons/units.....	83
2.7.1 Roof carriers.....	83
2.7.2 Towing brackets	84
2.7.2.1 Maximum trailer weights	84
2.7.2.2 Retrofitting a towing bracket.....	84
2.8 Raising the vehicle	85
3 Modifications to closed bodies	86
3.1 Interior	86
3.1.1 Safety features	86
3.1.2 Retrofitting seats	87
3.1.2.1 Installation of standard seats.....	87
3.1.2.2 Installation of aftermarket product seats or use of standard seats deviating from the standard seating	88
4 Implementations of special installations	89
4.1 Vehicles for transporting persons with restricted mobility	89
4.1.1 Basic vehicle equipment	89
4.1.2 Selection of steering rack for conversions for people with disabilities	89
4.1.3 Notes on conversion solutions for the wheelchair transporter	90
4.1.4 Notes on installing manual operating devices for the foot brake	90
4.1.5 Deactivating airbags / belt tensioner systems	90
4.2 Taxi / private hire car.....	92
4.2.1 Preparation ex works for taxis and private hire cars.....	92
4.3 Plug-in hybrid electric vehicle (PHEV).....	93
4.3.1 High-voltage system	93
4.4 Multivan for converters	96
5 Technical data	101
5.1 Dimension drawings	101
5.2 Diagrams (foil templates).....	102
5.3 Current flow diagrams	103
5.4 CAD models	104
6 Weights (masses).....	105
7 Notes on homologation of equipping and conversions	106
7.1 Availability with a Certificate of Conformity for a complete vehicle ex works – EU 6EA/6EB light duty WLTP.....	106
8 List of changes	107

List of abbreviations

ABH	Converter
CAN	Controller Area Network (standardised vehicle communication system)
CFCU	Customer-specific control unit
CoC	Certificate of Conformity
EMC	Electromagnetic compatibility
erWin	Electronic repair and workshop information from Volkswagen AG
SCR	Selective catalytic reduction
UNECE	United Nations Economic Commission for Europe
WLTP	Worldwide Harmonized Light-Duty Vehicles Test Procedure

1 General information

1.1 Introduction

These converter guidelines provide converters with important technical information which must be complied with when planning and manufacturing a body for road safety and operational reliability. The add-on, body, installation or conversion work required for this is referred to below as “body activities”.

Due to the vast number of converters and types of bodies, it is not possible for Volkswagen AG to predict all possible modifications which can occur due to the body activities, e.g. with regard to vehicle handling, stability, weight distribution, centre of gravity of the vehicle and its handling characteristics. Therefore, Volkswagen AG does not accept any liability for accidents or injuries arising from modifications of this kind made to its vehicles, especially if the changes have a negative effect on the vehicle as a whole. As a result, Volkswagen AG only accepts liability for its own design, production and instruction services. The converter itself is obliged to ensure that its body activities are not faulty in themselves, and also that they cannot result in faults or dangers on the vehicle as a whole. The converter must also ensure the conformity of the body activities with the respective and applicable laws (in particular approval and registration processes). The converter itself is liable in the event that this obligation is violated.

These converter guidelines are intended for professional converters. As a result, these converter guidelines assume corresponding background knowledge. Note that some work (e.g. welding on load-bearing parts) is only allowed to be performed by appropriately qualified personnel. This requirement exists in order to avoid risks of injury and to achieve the quality needed in the body activities.

1.1.1 Concept of this Owner's Manual

The following converter guidelines are divided into eight chapters so that you can find information rapidly:

1. [Introduction](#)
2. [Technical data for planning](#)
3. [Modifications to closed bodies](#)
4. [Implementations of special bodies](#)
5. [Technical data](#)
6. [Weights \(masses\)](#)
7. [Notes on homologation of modifications and conversions](#)
8. [Listings](#)

Information

For more information, [see chapter 1.2.1.1 “Contact”](#) and [chapter 1.2.2 “Converter guidelines, consulting”](#).

It is essential that the limit values selected in chapter 2 “Technical data for planning” are complied with and are used as the basis for planning.

1.1.2 Means of representation

The following means of representation are used in these converter guidelines:

Warning note

A danger note draws your attention to possible accident or injury risks to which you or other persons might be exposed.

Environmental note

An environmental note provides you with information about environmental protection.

Practical note

This note draws your attention to the risk of possible damage to the vehicle, as well as to regulations and provisions to be observed.

Information

This note indicates additional information.

1.1.3 Vehicle safety

Warning note

Before assembling external bodies or power units, it is essential that you read the chapters in these converter guidelines that are related to installation, as well as corresponding chapters in the instructions and information for the suppliers' power units and in the detailed Owner's Manual for the basic vehicle. Otherwise you will not be able to recognise dangers, and might expose yourself or others to danger.

We recommend that you use parts, power units, conversion parts or accessories that have been tested by Volkswagen AG for the corresponding vehicle type.

Have the vehicle's safety checked immediately if non-recommended parts, power units, conversion parts or accessories are used.

Practical note

It is essential that you comply with European vehicle approval or UNECE R regulations, as well as national registration regulations and also technical vehicle regulations. This is because body activities on the vehicle can alter the vehicle type under registration regulations and the operating permit may be invalidated.

This applies in particular to:

- Modifications which change the vehicle type approved in the operating permit
- modifications which might be expected to endanger road users or
- modifications which impair the exhaust or noise emissions characteristics

1.1.4 Operational safety

Warning note

Incorrect interventions in electronic components and their software may result in these no longer functioning. Due to the networking of electronics, systems that were not modified can be affected.

Malfunctions to the electronics can significantly impair the operational safety of the vehicle.

Work on or modifications to electronic components must be performed by a qualified specialist workshop that has the required specialist knowledge and tools to perform the necessary work.

Volkswagen AG recommends a Volkswagen AG customer service workshop for this purpose.

Service by a qualified specialist workshop is essential, in particular for safety-relevant work and work on safety-relevant systems.

Some safety systems only operate when the engine is running. Therefore, do not switch the engine off when driving.

1.1.5 Note on copyright

The texts, pictures and data contained in these converter guidelines are subject to copyright.

This also applies to editions on CD-ROM, DVD or other media.

1.2 General information

The following pages contain technical guidelines for converters and equipment fitters on the design and assembly of bodies. The converter guidelines must be strictly adhered to when performing any modifications to the vehicle. The current version of the German edition of the converter guidelines is the exclusive authority for the most up-to-date information.

This also applies to legal claims. Should the converter guidelines include references to legal regulations, then no guarantee can be provided for the completeness and correctness of this content, or that it is up-to-date. Country-specific features can vary.

1.2.1 Product and vehicle information for converters

1.2.1.1 Contact in Germany

If you have questions concerning vehicle models from Volkswagen Commercial Vehicles, you can contact us via the internet portals of Volkswagen AG (www.customized-solution.com) or via one of the following methods:

Free hotline (from a German landline)	00 800-2878 66 49 33 (00 800-CUSTOMIZED)
Contact (email)	customizedsolution@volkswagen.de
Personal contacts	https://www.customized-solution.com/de/de/service-informationen/kundenbetreuung

1.2.1.2 International contact

Please contact the converter's support personnel at the responsible importer for technical advice relating to Volkswagen Commercial Vehicles models and as a point of contact for conversions.

To find the contact person responsible for you, please register on the Volkswagen AG CustomizedSolution portal (<https://www.customized-solution.com>).

Help is available for the registration option using the "Help" menu option.

International hotline	00-800-2878 66 49 33 (00-800-CUSTOMIZED)
Email	customizedsolution@volkswagen.de
Personal contacts	https://www.customized-solution.com/en/en/service-information/customer-care

1.2.1.3 Electronic repair and workshop information from Volkswagen AG (erWin*)

Converters can access repair and workshop information, e.g.:

- Current flow diagrams
- Workshop manuals
- Maintenance
- Self-study Programmes
- via the Electronic Repair and Workshop Information System from Volkswagen AG (erWin*).
<https://volkswagen.erwin-store.com/erwin/showHome.do>

Converters with Integrated or PremiumPartner status are eligible for discounted annual licences that can be requested in the Customized Solution portal under My Customized Solution portal/Requirements/Planning and Development.

For exporting, converters with Partner status receive information in this regard from their point of contact at the importer.

*Information system, subject to payment

1.2.1.4 Genuine Parts Online Ordering Portal*

For the purchase of spare parts and for the research of Volkswagen Genuine Parts, our latest parts catalogues are available on the Internet in the "Genuine Parts Online Ordering Portal":

<http://www.partslink24.com>

*Information system, subject to payment

1.2.1.5 Online Owner's Manual

Detailed information about the functions and handling of your vehicle can be found in your Owner's Manual which is enclosed with your vehicle ex-works. In addition to the hard copy of the Owner's Manual, the following link and VIN (vehicle identification number) of your vehicle can be used to receive the Owner's Manual in electronic form.

https://userguide.volkswagen.de/public/vin/login/de_DE

1.2.1.6 European Type Approval (ETA) and EC Certificate of Conformity (CoC)

Directive (EU) 2018/858 of the European Parliament establishes the standard for the approval of motor vehicles and their trailers, and of systems, components and separate technical units intended for such vehicles.

Provisions were also adopted in these guidelines for the approval of vehicles produced in several stages: the multi-stage approval process. Accordingly, each manufacturer involved in the construction of a vehicle is itself responsible for the approval of modified or added scopes in its production stage.

The manufacturer may choose one of the four following methods:

- EU type approval (ETA)
- EU type approval for small series
- National small series type approval
- Individual approval

CoC = Certificate of Conformity. A document that verifies the conformity of certain goods – and therefore also of vehicles and bodies – in accordance with the recognised (international) standards. The purpose of this EC Certificate of Conformity is to facilitate the approval of goods on international markets. As a result, the document is needed above all in import and export as part of the customs clearance procedure.

The manufacturer, the owner of an EU type approval or EU small series type approval, is obliged to provide a Certificate of Conformity with every vehicle which corresponds to an approved type. If you are planning to apply multi-stage type approval, an agreement must be concluded in accordance with the 2018/858/EU regulation.

1.2.1.7 Worldwide Harmonized Light-Duty Vehicles Test Procedure (WLTP)

New consumption values/ranges calculated in accordance with the new WLTP standards apply from September 2017 for new passenger cars entering the market and from September 2018 for new light commercial vehicles entering the market.

As of 1 September 2018, certified WLTP measurements must be available for all newly registered passenger cars. The rule enters into force for larger light commercial vehicles one year later on 1 September 2019. 28+6 markets in Europe are affected by the WLTP.

WLTP stands for Worldwide Harmonised Light Vehicles Test Procedure. This is a worldwide standardised testing procedure for determining fuel consumption/electric range and exhaust emissions.

It is replacing the NEDC (New European Driving Cycle) test procedure that has been in force since 1992.

Unlike the NEDC, the WLTP takes into account individual special equipment and conversion solutions for weight, aerodynamics, electrical system requirements (no-load current) and rolling resistance which have an impact on the fuel consumption/electric range and exhaust emissions. This includes, in particular, modifications that result in a larger end face, a different radiator inflow area, a higher kerb weight for the vehicle or changes to the tyre size or the rolling resistance. Special equipment that consumes power, such as the air conditioning system or seat heating, still remains switched off for the duration of the test procedure.

Before initial approval, conversions or add-ons where WLTP is relevant can be made if they are approved by way of an individual approval or multi-stage type approval.

The Volkswagen type approval can be used for the multi-stage type approval for vehicles with conversions or add-ons that remain within the ISC parameters/maximum technical specifications for bodies. If the body or conversion is outside the ISC parameters/maximum technical specifications defined by the manufacturer for bodies, the converter must demonstrate compliance with the exhaust gas emissions requirements/electric range.

Information about the ISC parameters/maximum technical specifications for add-on parts can be found on the Volkswagen CustomizedSolution portal. Please ask your technical service/test centre for advice if you have questions about alternatives.

To determine the consumption values of converted new vehicles in compliance with the WLTP procedure and to obtain a WLTP certification, the “WLTP Conversion Calculator” is available to you.

You can find more information as a Registered Converter on the Customized Solution portal/WLTP:

Germany/International: <https://www.customized-solution.com>

1.2.1.8 Amendments to legislation from 1 January 2022

Regulation (EU) 2018/858 EU and national (Art. 44 and Art. 45)

Affected: all vehicle classes M1, N1 (light duty)

For complete vehicles completed ex works at the OEM, the following applies:

Complete vehicles that have been modified with add-ons/conversions after completion ex works at the OEM and before initial registration must resubmit CO₂/consumption values for the second stage.

These can be identified using the WLTP calculator in accordance with the available homologations.

Options for calculating weight and/or aerodynamic changes are available.

If individual values are not available for the respective conversion, a type approval can be checked in coordination with the technical service/regulatory authority.

For all vehicles and/or engine-gearbox variants for which no values can currently be generated using the WLTP calculator, please contact your responsible technical service department and check whether individual approval or multi-stage type approval is possible.

Further information on this topic can be found in [chapter 7 “Notes on homologation of equipping and conversions”](#).

1.2.1.9 Manufacturer’s declaration

We issue a manufacturer’s declaration for the basic vehicle for the following scopes:

- Electromagnetic compatibility (EMC)
- Speed/distance signal

Please contact Customer Care: nutzfahrzeuge@volkswagen.de.

1.2.2 Converter guidelines, consulting

The converter guidelines define the requirements for converters/equipment fitters for construction and assembly of custom body-related parts and conversions for Volkswagen Commercial Vehicles.

The converter guidelines must be strictly adhered to when performing any modifications to the vehicle.

The statutory requirements, technical vehicle regulations and guidelines stated in the Directive are not comprehensive. When making modifications to vehicles, all applicable statutory requirements and all technical vehicle regulations and guidelines must be observed. The work safety regulations of the trade association and the Machinery Directive must be observed.

For all modifications, it must be ensured that the functional safety of all parts of the running gear, the body and the electrical system remains unaffected. Modifications must only be performed by qualified specialists and in accordance with the generally acknowledged rules of the automotive industry.

Prerequisites for modifications to used vehicles:

The vehicle shall be in a good overall condition, i.e. structural parts such as longitudinal and cross members, pillars etc. shall not be corroded to such an extent that structural stability might be adversely affected.

Vehicles whose modifications might affect the validity of the general certificate of roadworthiness must be presented to an authorised testing centre for approval. It is recommended to clarify in advance with the relevant authority whether approval is required. Please contact us in case of inquiries for proposed modifications.

When inquiring about planned modifications, please enclose two sets of design drawings of the complete scope of the modification, including weights, centre of gravity and dimensions, which also clearly show how the body is attached to the chassis.

Please also provide information about the intended operating conditions of the vehicle.

If bodies comply with the present converter guidelines, no additional approval by Volkswagen AG is required for the presentation of the vehicle at the relevant authority examining roadworthiness.

1.2.2.1 Letter of non-objection

Volkswagen AG does not issue body approvals for non-Volkswagen bodies. It merely provides converters with important information and technical specifications for dealing with the product in these guidelines. As a result, Volkswagen AG recommends that all work should be carried out on the basic vehicle and the body in accordance with the current Volkswagen converter guidelines applicable to the vehicle in question.

Volkswagen AG does not recommend body activities which

- are not conducted according to these Volkswagen converter guidelines
- exceed the gross vehicle weight rating
- exceed the gross axle weight rating

Volkswagen AG issues letters of non-objection on a voluntary basis, as follows:

The assessment conducted by Volkswagen AG is exclusively based on the documents submitted by the converter who is carrying out the modifications. Only the expressly designated scopes are tested and ensured and essentially compatible.

The safety certificate relates to the presented whole vehicle, and not

- To the design of the overall body,
- Its functions or
- The planned use.

Non-objection is only possible if the design, production and assembly are carried out by the converter performing the modifications in accordance with the current technology and in compliance with the applicable converter guidelines of Volkswagen AG – and assuming any deviations from these guidelines have been declared to be technically safe. The letter of non-objection does not release the converter who is performing the modifications from its responsibility for the product, or from its obligation to carry out its own calculations, tests and a trial of the whole vehicle in order to ensure that the operational safety, road safety and driving properties of the whole vehicle it has manufactured are acceptable. Accordingly, it is necessary to ensure that the converter exclusively accepts its responsibility for ensuring that its body activities are compatible with the basic vehicle as well as the operational and road safety of the vehicle. It is expressly stated that the letter of non-objection from Volkswagen AG does not represent a technical approval for the investigated changes.

In the course of assessment of a presented vehicle, an assessment report is written as a means of obtaining a letter of non-objection (LONO report).

The following assessment results are possible:

- Classified as “safe”
If the whole vehicle is classified as “safe”, the Sales department can subsequently issue the LONO certificate
- Classified as “not safe”
Classification as “not safe” in the individual categories:
 - + Basic vehicle configuration
 - + Impairment of the basic vehicle and possibly
 - + Sole body item
 leads to a corresponding classification of the whole vehicle. This means no LONO certificate can be issued initially.

In order for a not-safe classification to be resolved, the LONO report states the necessary modification for each item in question. In order for the letter of non-objection to be obtained, these points will have to be addressed by the converter and documented in a clearly comprehensible manner in a report along the same lines as the LONO report. On the basis of this detailed report, it is possible for the desk-review assessment to be completed with a positive result.

Depending on the defective points, it may be necessary not only to provide documentation of the defect resolution but also for the vehicle from the first inspection to be presented again. The first report indicates if it will be necessary for a new assessment to be carried out on the vehicle.

The assessment report may also contain “notes/recommendations”.

Notes/recommendations are technical remarks which do not have any effect on the letter of non-objection. They should be regarded as advice and suggestions for further consideration to support the continuous improvement of the final product for the customer.

In addition, notes/recommendations “solely relating to the conversion” can also be formulated. The notes and recommendations stated as “solely relating to the body/conversion” must be dealt with and documented before the vehicle can be presented in the CustomizedSolution portal.

Practical note

Country-specific laws, directives and approval regulations shall be observed!

1.2.2.2 Application for the letter of non-objection

Before starting any work on the vehicle, verifiable technical documentation and drawings must be submitted to the responsible department (see chapters 1.2.1.1 “Contact in Germany” and 1.2.1.2 “International contact”) as part of the letter of non-objection evaluation.

Prompt handling of the request requires:

- Documents preferably in standardised digital formats (e.g. PDF, DXF, STEP)
- Technical data and documentation should be complete

The following details must be included:

- Vehicle type
 - + Vehicle design (Multivan)
 - + Wheelbase
 - + Frame overhang
- Vehicle identification number (if already available)
- Any deviations from these converter guidelines must be indicated on all documentation.
- Axle load calculation
- All data about dimensions, weight and centre of gravity (weighing certificate)
- Special operating conditions (e.g. poor road conditions, extreme dust, high altitude, or ambient temperature extremes)
- Certificates (e-registration, seat tensile test)
- Attachment of the body on the vehicle
- Type of fixation for the body or add-ons to the vehicle frame (e.g. bolted connections)
 - + Positioning
 - + Type
 - + Size
 - + Number
 - + Property class
- Type of fixation for the body or add-ons to the vehicle frame (bolting, bonding, welding)
- Photographic documentation of the conversion
- All documents must clearly correlate with the conversion (e.g. drawings marked with allocated numbers)
- General (functional) description of deviations from the production vehicle, or added components
- Electric wiring diagram
 - + Details of the consumption of additional electrical equipment

Complete documentation avoids the need for clarification queries and accelerates the processing.

1.2.2.3 Legal entitlements

- There is no legal entitlement for a letter of non-objection to be issued
- Due to ongoing technical development and the information derived from this, Volkswagen AG is entitled to refuse a letter of non-objection even if a comparable certificate had been issued formerly
- The letter of non-objection can be restricted to individual vehicles
- The subsequent issue of a letter of non-objection may be refused for vehicles that have already been completed or delivered
- The converter is solely responsible for:
 - + The function and compatibility of its body activities with the basic vehicle
 - + Road safety and operational reliability
 - + All body building activities and installed parts

1.2.3 Warranty and product liability of the converter

UN ECE Regulation No. 155 for vehicle cyber security and UN ECE Regulation No. 156 for vehicle software updates apply to all new vehicle types from the middle of 2022 and to all new vehicle registrations from the middle of 2024; these contain new requirements for automotive cyber security and updates.

Volkswagen attaches great importance to the security of our digital services and products. We therefore strive to identify and address relevant security vulnerabilities accordingly. We would be pleased to receive any information in this regard. If you have found any indications of a vulnerability, please email us at vulnerability@volkswagen.de so that we can address the vulnerability. After receiving the message, we examine and act upon the information received regarding possible vulnerabilities in our processes.

Insofar as modifications are made to the vehicle, the converter shall also ensure that these regulations are applied and complied with. The converter's or equipment fitter's warranty conditions apply to the converter's or equipment fitter's scope of supply. Therefore, warranty claims associated with complaints to this scope of supply cannot be made under the warranty conditions applicable to Volkswagen Commercial Vehicles.

Defects of bodies, installations and equipping provided by third parties as well as defects of the vehicle caused by the said bodies, installations or conversions are excluded from the Volkswagen warranty and also from the Volkswagen paint and body warranty. This also applies to accessories which were not installed and/or supplied by the vehicle manufacturer.

The converter or equipment fitter is solely responsible for the design and assembly of bodies and the execution of conversions.

All modifications must be documented by the converter or equipment fitter.

The converter is responsible for ensuring that all modifications it performs comply with the technical vehicle regulations, specifications and standards that apply in the countries of registration.

Due to the multitude of modifications and diversity of operating conditions, the information provided by Volkswagen AG is subject to the reservation that modified vehicles are not tested by Volkswagen AG. Modifications may affect the properties of the vehicle.

For reasons of liability, the converters/equipment fitters must provide the following information in writing to their customers:

"Due to the modifications* to your Volkswagen Commercial Vehicles basic vehicle, the properties of your basic vehicle may have changed. Please understand that Volkswagen AG does not assume any liability for any negative effects resulting from the modifications* to the vehicle."

In individual cases, Volkswagen AG reserves the right to demand evidence of the information being passed on to the customer.

No general legal entitlement for the approval of a body modification exists, even if such approval was previously granted.

If bodies comply with the present guidelines, no additional approval by Volkswagen AG is required for the presentation of the vehicle at the relevant authority examining roadworthiness.

* At this point, the term "modification" may be substituted by a more precise description of the work performed, e.g. by "camping equipment installation" or "wheelbase extension".

1.2.4 Ensuring traceability

Body dangers only detected after delivery can mean that subsequent measures in the market will be necessary (customer information, warning, call-back). To make these measures as efficient as possible, it is necessary to be able to trace the product after delivery. For this purpose, and in order to be able to use the central vehicle register (CVR) operated by the Federal Motor Transport Authority or comparable registers abroad for tracing the affected vehicle keepers, we strongly recommend that converters should store the serial number/identification number of their body linked to the vehicle identification number of the base vehicle in their databases. For this purpose, it is also recommended that customers' addresses be stored and that subsequent owners be provided with a means of registration.

1.2.5 Badges

VW badges and VW emblems are trademarks of Volkswagen AG. VW badges and VW emblems are not allowed to be removed without authorisation, or to be attached in a different location.

1.2.5.1 Positions on rear of the vehicle

VW badges and VW emblems which are enclosed in the delivery must be fitted in the location intended by Volkswagen.

1.2.5.2 Appearance of whole vehicle

If the vehicle does not correspond to the appearance and the quality requirements set by Volkswagen AG, then Volkswagen AG reserves the right to request removal of the Volkswagen AG trademarks.

1.2.5.3 Non-Volkswagen trademarks

Non-Volkswagen badges are not allowed to be attached next to Volkswagen badges.

1.2.6 Recommendations for vehicle storage

Extended storage times cannot always be avoided. The following measures are recommended to ensure that vehicle quality is not affected by long-term storage:

Carry out the following when the vehicle is delivered:

- Check weekly for aggressive deposits (e.g. bird droppings, industrial deposits) and clean if necessary
- 12-V battery: Determine the SOC* and, if necessary, complete the battery care programme (see the instructions "Carry out no later than every three months")
- High-voltage battery: Read the state of charge in the instrument cluster.
 If the charging indicator is in the red area. This means: $\leq 10\%$ or $< 1/4$ or < 50 km (depending on the display)
 Charge the high-voltage battery until the display shows a maximum of half full
- Set the tyre pressure to 3.4 bar (not the spare wheel)
- Open all front vents in the dash panel, set the blower to maximum and run for one minute
- Remove any paper and other objects from the storage compartments and surfaces in the vehicle interior (dash panel, seats, luggage space) except for items that serve to protect the surfaces
- If fitted, roll in the luggage compartment cover and the sun blinds
- In addition, for new vehicles: Correct the position of the transport protective hoods if necessary
- Record the date of delivery as a reference for all vehicle care measures

*State of Charge

Carry out after no longer than six weeks:

- For vehicles stored without a solar panel:
 Battery care programme (see "Carry out after no longer than three months")
 Do not disconnect the battery to do so!

Carry out after no longer than three months:

- Remove rust from brake disc
 - When storing vehicles without solar panels: complete the battery care programme
 - Do not disconnect the battery to do so!
- No battery status display in the dash panel insert:
 - Measure the open-circuit voltage of the 12 V battery two hours after the last electrical equipment was active
 - a) At an open-circuit voltage between 11.6 V and 12.5 V: Fully charge immediately
 - b) If the open-circuit voltage is <11.6 V: Mark and fully charge the defective battery
- A maximum charging voltage of 14.8 V must not be exceeded.
- The totally discharged battery must be replaced before the vehicle is handed over to the customer

Practical note

To determine the exact residual capacity of the 12 V battery, please proceed in accordance with the test conditions in the Workshop Manual.

Carry out after no longer than six months:

- For vehicles stored with a solar panel:
 - Carry out the battery maintenance programme (see “Carry out after no longer than three months”)
 - Do not disconnect the battery!

Practical note

When connecting a battery charger, the following connection specification must be observed under all circumstances:

- Positive: always connect to jump-start connection point, if fitted, otherwise to positive battery terminal
- Negative: always at the body earth provided for charging, as the direct connection of a battery charger to the negative terminal of the battery in some vehicles can lead to falsification of the battery status recording by the on-board electronics

Practical note

Charging the battery when it is installed is recommended. Series and parallel charging of batteries is unauthorised.

For more information on the battery, see [chapter 2.5.4 “Vehicle battery”](#).

Information

You can find further information about vehicle storage in the following documents:

- Owner's Manual ([see chapter 1.2.1.5 "Online Owner's Manual"](#))
- Vehicle care programme

1.2.7 Compliance with environmental rules and regulations

Environmental note

The following principles of environmentally friendly design and material selection should be followed right from the planning stage of add-ons or bodies, and the statutory requirements in the EU Directive on End-of-Life Vehicles 2000/53/EC should also be taken into account.

The converter is responsible for ensuring that all modifications it performs comply with the environmental regulations, specifications and standards that apply in the countries of registration and sale. These may go beyond the existing prerequisites of the basic vehicle and are the responsibility of the converter.

The converter must ensure that add-ons and bodies (conversions) comply with all applicable environmental rules and regulations, especially, but not only, EU directive 2000/53/EC concerning end-of-life vehicles and the REACH Regulation (EC) 1907/2006 relating to restrictions on the marketing and use of certain dangerous substances and preparations ("low flammability" and certain flame-retardant agents).

The registered keeper must keep all assembly documentation concerning the modification and, in the event of the vehicle being scrapped, hand it over together with the vehicle to the dismantler. This ensures that modified vehicles are processed in compliance with environmental rules and regulations at the end of their life cycle.

Materials which represent a potential risk such as halogen additives, heavy metals, asbestos, CFCs and chlorinated hydrocarbons shall be avoided.

- EU Directive 2000/53/EC must be adhered to
- Preferably, materials which allow valuable substance recycling and closed material cycles shall be used
- The material and production process shall be selected so that only low amounts of easily recyclable waste are generated
- Plastics shall only be used where these offer advantages in terms of cost, function or weight
- In the case of plastics, especially composite materials, only mutually compatible substances from one material family may be used
- With regard to components that are relevant for recycling, the number of plastic types used shall be kept as low as possible
- It is necessary to check whether a component can be manufactured from recycled material or with recycled additives
- Care shall be taken to ensure that recyclable components can be removed easily, e.g. by means of snap-lock connections, predetermined breaking points, good accessibility, use of standard tools
- Simple, environmentally friendly removal of the fluids shall be ensured by means of drain plugs etc.
- Wherever possible, the components shall not be painted or coated; instead, dyed plastic parts shall be used
- Components in areas at risk of accident shall be designed to be tolerant of damage, repairable and easy to exchange
- All plastic parts shall be identified according to the VDA material sheet 260 ("Components of motor vehicles; Identification of materials"), e.g. "PP-GF30R"

1.2.8 Recommendations for inspection, maintenance and repair

A service schedule outlining inspection and maintenance work must be provided for the modifications performed by the converter or equipment fitter. These instructions or schedules must include the maintenance and inspection intervals as well as the required operating fluids and materials and the spare parts. It is also important to specify parts and components with a limited service life which are to be checked at regular intervals in order to ensure service reliability and timely replacement where required.

This should be supported by a repair manual including tightening torques, settings and tolerances as well as other relevant specifications. Special tools, including their source of supply, must also be stated.

Converters/equipment fitters must also state which work may only be performed only by themselves or by their authorised workshops. If the converter's or equipment fitter's scope of supply includes electric, electronic, mechatronic, hydraulic or pneumatic systems, then current flow diagrams and diagnosis routines or similar documentation facilitating a systematic search for faults should be provided.

Please observe the Volkswagen AG Owner's Manual for the inspection, maintenance and repair of the basic vehicle.

Please observe the Volkswagen AG Owner's Manual for the inspection, maintenance and repair of the base vehicle. Please only use brake fluids and engine oils approved by Volkswagen for your vehicle.

More detailed information on brake fluids and engine oils can be found in the Owner's Manual for your vehicle (see also [chapter 1.2.1.5 "Online Owner's Manual"](#)).

1.2.9 Accident prevention

Converters shall ensure that the bodies comply with applicable legal rules and regulations as well as all regulations regarding work safety and accident prevention. All safety rules and the information material provided by accident insurance providers shall be observed.

All technically feasible measures must be taken to prevent unsafe operation.

Country-specific laws, directives and approval regulations must be observed.

The converter is responsible for the compliance with these laws, rules and regulations.

For further information about commercial freight traffic in the Federal Republic of Germany please contact:

P.O. box address	Berufsgenossenschaft für Fahrzeughaltungen Fachausschuss "Verkehr" Sachgebiet "Fahrzeuge" Ottenser Hauptstrasse 54 D-22765 Hamburg
Telephone	+49 (0) 40 39 80 – 0
Fax	+49 (0) 40 39 80-19 99
Email	info@bgf.de
Home page	http://www.bgf.de

1.2.10 Quality system

Worldwide competition, increased quality requirements placed on the overall Transporter product by customers, national and international product liability legislation, new forms of organisation and increasing pressure on costs mean that effective quality assurance systems are demanded in all areas of the automotive industry. The requirements of a quality management system of this kind are described in DIN EN ISO 9001.

For the reasons stated above, Volkswagen AG strongly recommends that all converters should set up and maintain a quality management system with the following minimum requirements:

Definition of responsibilities and authorisations including organisational plan.

- Description of the processes and procedures
- Appointment of quality management representative
- Performing contract and build feasibility checks
- Performing product checks based on specified instructions
- Regulating the handling of faulty products
- Documentation and archiving of test results
- Ensuring the quality records of employees are up to date
- Systematic monitoring of test equipment
- Systematic material and parts identification
- Performing quality assurance measures at the suppliers
- Ensuring the availability of process, working and test instructions, and that they are up to date, in the departments and in the workplace

1.3 Planning bodies

Practical note

In addition to a user and maintenance friendly design (see [chapter 2.3.2.10 “Corrosion protection measures”](#)), the right choice of materials and therefore observance of corrosion protection measures are important during the planning of bodies.

1.3.1 Selecting the basic vehicle

The base vehicle needs to be selected carefully to ensure safe usage in the respective field.

When planning, please consider the following for the use in question:

- Wheelbase
- Engine/gearbox
- Final drive ratio
- Gross vehicle weight rating
- Seating version (number and arrangement)
- Electric scopes (e.g. interior lighting, battery, electric interface for special vehicles, customer-specific functional control unit (CFCU*)). See [chapter 2.5 “Electrics/electronics”](#).

Practical note

Before carrying out body building or conversion work, the supplied base vehicle should be checked with regard to the fulfilment of applicable requirements.

Please choose the appropriate electrical interface for the planned use of the vehicle.

See [chapter 2.5.3 “Electrical interface for special vehicles”](#).

*CFCU: customer-specific functional control unit, see also [chapter 2.5.3.2](#).

You will find more information on the available Multivan versions and body versions in the sales documentation.

Please contact us ([see chapters 1.2.1.1 “Contact in Germany”](#) and [1.2.1.2 “International contact”](#)).

Information

On the Volkswagen AG homepage, you can put together your vehicle using the configurator and view the special equipment available:

<http://www.volkswagen-nutzfahrzeuge.de/de/cc5.html>

1.3.2 Vehicle modifications

Before starting work on the body, the converter should check whether the vehicle is suitable for the planned body.

Build dimension drawings, product information and technical data can be obtained from the responsible department or via the communication system for the planning of bodies (see [chapters 1.2.1.1 “Contact in Germany”](#), [1.2.1.2 “International contact”](#) and [1.2.2 “Converter guidelines, consulting”](#)).

Furthermore, the special equipment available from the factory should be noted (see [chapter 1.4 “Special equipment”](#)).

Vehicles delivered from the factory comply with European directives and the national laws (except for some vehicles for countries outside Europe).

The vehicles also need to meet the European directives and the national laws after the modifications have been made.

Information

Please note that a majority of the EC directives announced to date have been annulled by Regulation (EC) 661/2009 “General Safety”. The EC directives have been replaced by new EU directives or UNECE regulations with the same corresponding content.

Practical note

Sufficient space must be provided in order to guarantee the function and operating safety of the power units.

Warning note

Do not modify the steering or brake system! Modifications to the steering and brake system can result in these systems no longer working correctly and failing. This may result in the driver losing control of the vehicle and causing an accident.

Practical note

Modifications to the noise encapsulation can have effects which are relevant to registration.

1.3.3 Vehicle acceptance

The officially recognised appraiser or tester from the converter must be informed about modifications to the vehicle.

Practical note

Country-specific laws, directives and approval regulations shall be observed!

1.4 Special equipment

We recommend using the special equipment from Volkswagen AG that can be obtained with a PR number for optimum adaptation of the body to the vehicle.

You can obtain information on special equipment provided by Volkswagen under PR numbers from your authorised repairer or from your available contacts for product and vehicle information for converters (see [chapters 1.2.1.1 “Contact in Germany”](#) and [1.2.1.2 “International contact”](#)). Please also note [chapter 4, “Implementation of special bodies”](#).

Information

Furthermore, on the Volkswagen AG homepage, you can put your vehicle together with the configurator and view the available optional equipment:

<https://www.volkswagen-nutzfahrzeuge.de/de/modelle.html>

Special equipment (e.g. reinforced springs, frame reinforcements, anti-roll bars etc.) or equipment fitted later increase the kerb weight of the vehicle.

The actual vehicle weight and the axle loads should be determined and documented by weighing before and after the modification. Not all additional equipment can be installed into every vehicle without problems. This applies in particular if it is fitted later on.

2 Technical data for planning

2.1 Basic vehicle

2.1.1 Vehicle dimensions

2.1.1.1 Multivan basic data

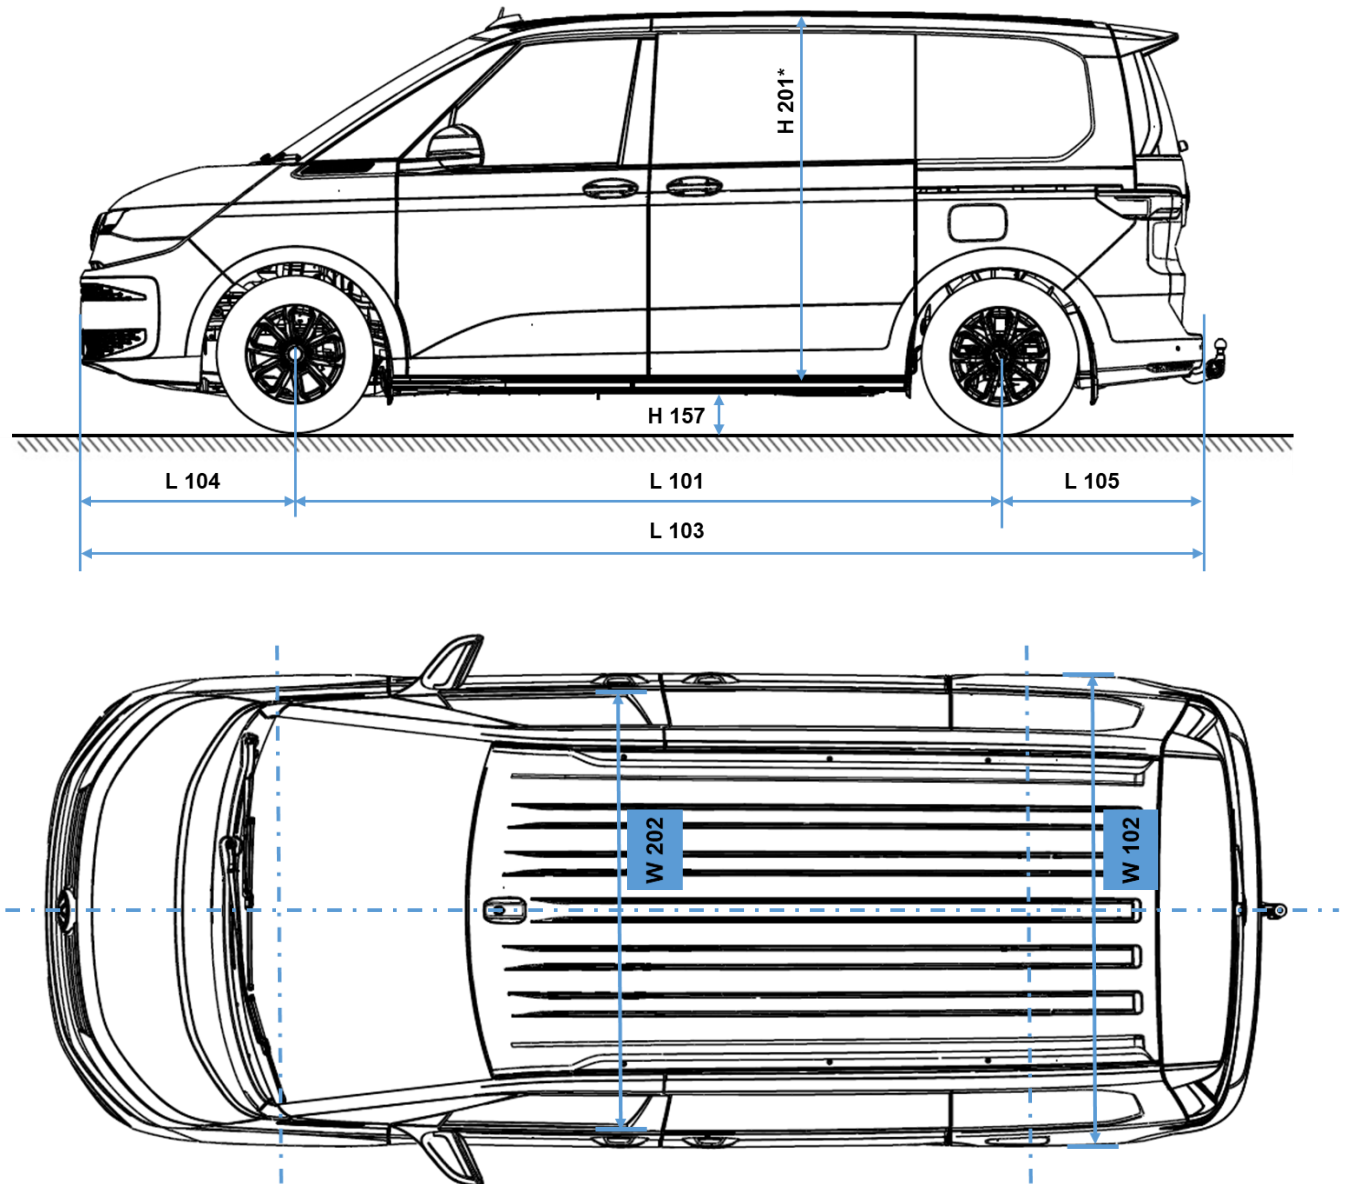


Fig. 1: Example vehicle dimensions of short + long Multivan (acc. to DIN 70020, P1)

* The roof heights can be found in the basic data table under the term H201.

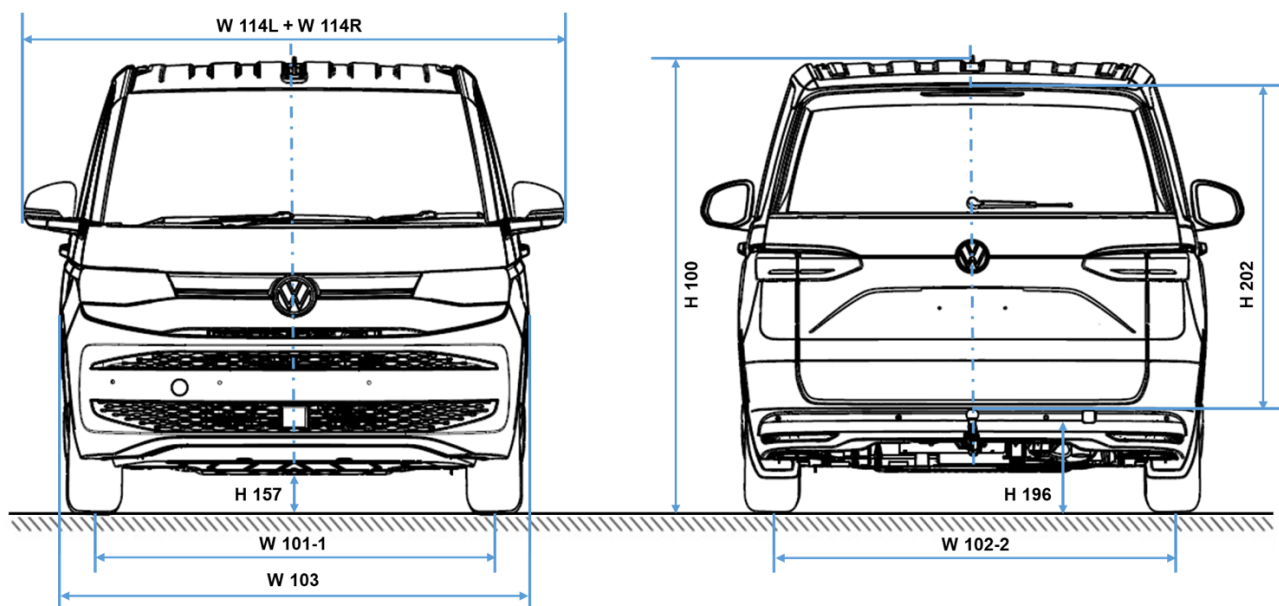


Fig. 2: Example vehicle dimensions of short + long Multivan (acc. to DIN 70020, P1)

Multivan basic data (ML1**) (All engines)			Multivan [mm]	Multivan long [mm]
Dimensions	L101	Wheelbase	3124	3124
	L103	Vehicle length	4973	5173
	L102	Vehicle length with rigid towing bracket (removable ball coupling)	5076	5276
	L515	Centre of gravity position, load compartment, distance from front axle (FA), 3-seater	3661	3761
	W103	Vehicle width (measuring point: door handle)	1941	1941
	H100	Vehicle height body	1907	1907
		-> lowered	1887	1887
	L104	Front overhang length	952	952
	L105	Rear overhang length	897	1097
	L105-1	Rear overhang length with towing bracket	1000	1200
	W101-1	Track at front		
		-> for rim offset 60/standard running gear	1659	1659
		-> for rim offset 58/standard running gear	1663	1663
		-> for rim offset 60/lowered	1664	1664
	W102-2	Track at rear		
		-> for rim offset 60/standard running gear	1659	1659
		-> for rim offset 58/standard running gear	1663	1663
		-> for rim offset 60/lowered	1664	1664
		-> for rim offset 58/lowered	1669	1669

Multivan basic data (ML1**) (All engines)			Multivan [mm]	Multivan long [mm]
	WX 1	Maximum rear axle width	1922	1922
	WX 2	Maximum front axle width	1918	1918
	H157	Ground clearance between axles acc. to 2007/46/EC	161	161
	A117	Breakover angle -> lowered	11.8° 10.8°	11.8° 10.8°
	A116-1	Front ramp angle at full load, limited by spoiler -> lowered	18° 16.1°	18° 16.1°
Dimensions	A116-2	Rear ramp angle at full load, limited by bumper -> lowered	16.6° 16.3°	13.2° 13.1°
Turning circle	D102	Minimum turning circle	12.1 m	12.1 m
Wheels/tyres		Basic tyres***	Smallest tyre 195/75 R16 xI 100H Largest tyre 245/45 R19 xI 102 H	
Load compartment measurements	L202	#Length of the load area (EC 1230/2012) not for M1 registration	1147	1347
	L212-1	Luggage compartment length 1st row of seats (without 2nd and 3rd row of seats)	2425	2625
		Luggage compartment floor length, 2nd row of seats (without 3rd row of seats)	1316	1516
		Luggage compartment length, 3rd row of seats	461	661
	F201-1	Load compartment area -> behind the front seats	3.3 m²	3.5 m²
		-> behind the 2nd row of seats	1.7 m²	1.9 m²
	W200	Largest luggage compartment width -> without 2nd and 3rd row of seats	1665	1665
		-> behind 3rd row of seats	1245	1245
	W202	Width between wheel housings	1207	1207
	H212	Height of the luggage compartment, minimum (with 2nd luggage compartment floor)	462	462
	H505	Loading height	1312	1312
	H196	Load sill height above ground level	580	583
	H508	Clear opening height of sliding door	1173	1173
	L903	Clear opening width of sliding door	931	931

Multivan basic data (ML1**)			Multivan [mm]	Multivan long [mm]
Load compartment measurements	H101-M	Maximum vehicle height	1907	1907
	H110	Vehicle height with rear lid open	2143	2146
	H202	Body opening height	1169	1169
	W206	Largest width of rear opening	1312	1312
Garage dimensions	W120-1	Vehicle width, front doors open	3804	3804
	W114-L	Y-coordinate of exterior mirror on driver side	1123	1123
	W114-R	Y-coordinate of exterior mirror on passenger side	1123	1123
Vehicle interior dimensions	H61-1	Effective headroom – 1st seat row	1024	1024
	H61-2	Effective headroom – 2nd seat row	1001	1001
	H61-3	Effective headroom – 3rd seat row	975	975

* ML3 – measurement load, loaded

** ML1 – measurement load, unloaded

*** The permitted tyre size varies depending on the engine and the gross vehicle weight rating.

2.1.2 Ramp angle and breakover angle

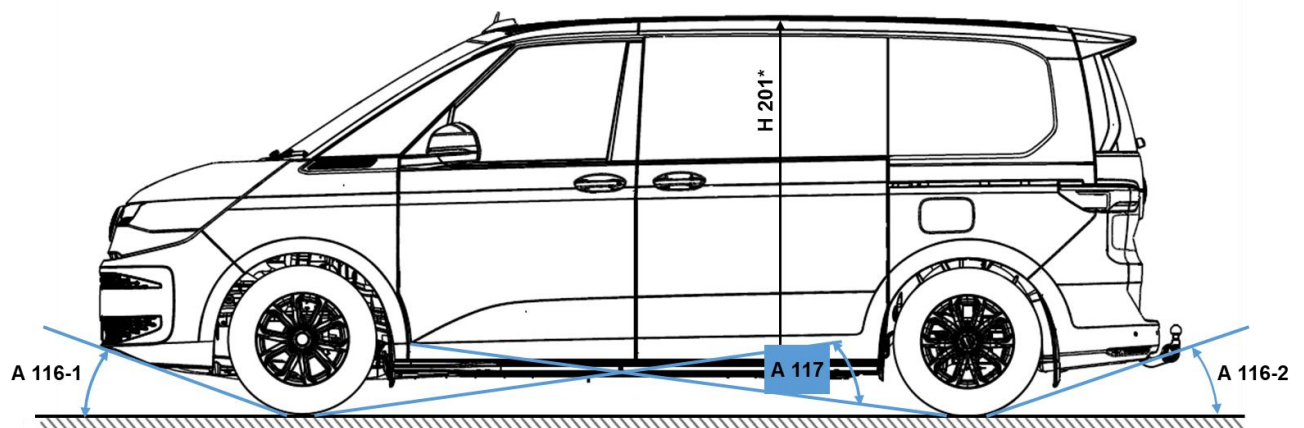


Fig. 1: Example vehicle dimensions of short + long Multivan (acc. to DIN 70020, P1)

The values for the ramp angle (A116) and the breakover angle (A117) can be found in the basic data table ([see chapter 2.1.1.1](#)).

2.2 Running gear

2.2.1 Permitted weights and kerb weights

Warning note

ATTENTION! Compliance with the maximum gross axle weight ratings specified in these converter guidelines is required for conversions that lead to an increase in the basic vehicle's axle weight rating (e.g. in the case of weight increases). If these values are exceeded, the durability of all components (and in particular the wheel hubs) must be checked and safeguarded using suitable measures.

Volkswagen AG offers the Multivan in the following weight classes: 2,600 kg, 2,750 kg and 2,850 kg.

Information

Load ratings depend on the engine. Equipment features can influence the payload or load weight by increasing/reducing the kerb weight. The weight values stated in the technical data refer to the standard, basic vehicle equipment. Weight tolerances of +5% in production are permitted in accordance with DIN 70020 and must be taken into account if necessary.

Installing special equipment reduces the payload.

The actual payload of a vehicle that is calculated from the difference between the gross vehicle weight rating and kerb weight can only be determined by weighing an individual vehicle.

Practical note

For permanent installations, the running gear must be adjusted afterwards. Otherwise, it can lead to premature, uneven wear on the front axle tyres.

Once the customer has loaded the vehicle to a normal load level for its purposes, the running gear must be measured again in accordance with the workshop manual, based on the current height of the edge of the wheel housing.

For more information, refer to the Workshop Manuals from Volkswagen AG:

<https://volkswagen.erwin-store.com/erwin/showHome.do>

2.2.2 Turning circle

See the basic data table ([chapter 2.1.1 “Vehicle dimensions”](#)).

2.2.3 Approved tyre sizes

The Volkswagen Owner's Manual provides information about the wheel/tyre combinations approved by Volkswagen AG in conjunction with snow chains (see the table of basic data in [chapter 2.1.1 “Vehicle dimensions”](#)).

2.2.4 Modifications to axles

Modifications to the axles are not permitted, because they can lead to an impairment in the vehicle handling and unstable vehicle handling.

2.2.5 Modifications to the steering system

Modifications to the steering system are not permitted.

Exceptions, e.g. Conversions for people with disabilities, shall be approved by Volkswagen AG prior to the conversion.

Please contact us before starting your conversion (see [chapter 1.2.1.1 “Contact in Germany”](#), [1.2.1.2 “International contact”](#)).

2.2.6 Brake system and brake control system ESC*

2.2.6.1 General information

Modifications to the brake system are not allowed under any circumstances:

- If the modification to the brake system goes beyond the scope of the operating permit
- If the air inflow and outflow to and from disc brakes are modified

Warning note

Work performed incorrectly on brake hoses, lines and cables may impair their function. This can lead to a failure of components or safety-relevant parts. Therefore, work on brake hoses, lines and cables should only be performed by a qualified specialist workshop.

*Electronic Stability Control

2.2.6.2 Routing additional lines along the brake hoses/brake lines

No other additional lines are allowed to be fastened to brake hoses and brake lines.

Additional lines must remain at a sufficient distance from brake hoses and brake lines under all operating conditions, and are not allowed to touch or chafe against such brake hoses/lines under any circumstances (see [chapter 2.5.2.1 “Electrical wiring/fuses”](#)).

2.2.7 Modification of springs, suspension mounting, dampers

The spring rates are never allowed to be modified.

We recommend using optimally matching springs from the Volkswagen delivery range for the vehicle with body.

Modifications to the springs must be appraised and recorded by the applicable technical test centre/monitoring organisation/technical service. Modifications that are not recorded and registered can result in invalidation of the vehicle's operating permit.

Practical note

We indicate that when the vehicle is converted to an air-sprung suspension system due to a change in the vibration behaviour of the wheels, this can lead to possible faulty displays of the factory-installed tyre pressure loss indicator (TPLI).

Please contact us before making any planned modifications to the running gear (see [chapters 1.2.1.1 “Contact in Germany”](#) and [1.2.1.2 “International contact”](#)).

2.2.8 Wings and wheel housings

The required clearance for the wheels including snow chains must be complied with.

Please take note of the information in the build dimension drawing.

2.3 Body-in-white

2.3.1 Roof loads

2.3.1.1 Dynamic roof loads

Vehicle type	Max. roof load
Vehicles with normal roof and two base carriers	100 kg
Vehicles with normal roof and an additional base carrier	100 kg

See [chapter 2.7.1 “Roof carriers”](#) regarding the fitting of roof carriers.

The limit value for the maximum centre of gravity position of the vehicle is not allowed to be exceeded.

2.3.1.2 Static roof loads

The values in the table (see [chapter 2.3.1.1 “Dynamic roof loads”](#)) refer to permissible roof loads during vehicle operation.

When using a static roof load, the following applies:

A static roof load of up to 250 kg does not cause any damage to the vehicle if the loads are evenly distributed. The maximum roof load may only be used when the vehicle is stationary. Vehicle operation with the static roof load is expressly prohibited. All available connection points of the body for roof carrier systems in the roof area must be used.

Direct loading of the roof surface is not permitted. One-sided loads can cause damage to the roof.

Volkswagen AG offers no warranty for damage to the vehicle resulting from improper use.

2.3.2 Modifications to the body-in-white

Changes to the body must not impair the function and strength of power units and operating devices of the vehicle, and they must not reduce the strength of weight-bearing parts.

During vehicle conversions and assembly of bodies, it is not permitted to make any modifications which impair the function and freedom of movement of the suspension (e.g. for maintenance and inspection work) or the accessibility to these parts.

2.3.2.1 Bolted connections

If series-production bolts/nuts have to be renewed, it is only permitted for bolts/nuts to be used which have the:

- Same diameter
- same strength
- same bolt standard or bolt type
- same surface coating (corrosion protection, coefficient of friction)
- same thread pitch

Comply with VDI guideline 2862 during all assemblies.

Shortening the free clamping length, changeover to waisted shank and use of bolts with a shorter free thread proportion are not permitted.

Furthermore, take the settling behaviour of bolted connections into account.

When attaching components to the basic vehicle using bolts, make sure that no panels or other components of the basic vehicle are bent or damaged.

The use of Volkswagen tightening torques assumes that the total coefficient of friction is in the range $\mu_{\text{tot}} = 0.08$ to 0.14 for the particular items being bolted together.

If bolts are tightened by torque and final tightening angle at Volkswagen, no change of design is possible.

Risk of accident

No safety-relevant bolted connections, e.g. for wheel guidance, steering and brake functions, may be modified. Otherwise the designated function may be impaired. This may result in the driver losing control of the vehicle and causing an accident. The new assembly is to be carried out according to VW Customer Service instructions, using suitable standard parts. We recommend the use of Volkswagen genuine parts.

Information

Information about Volkswagen customer service instructions can be provided by any Volkswagen Customer Service.

2.3.2.2 Welding work

The following instructions must be observed before carrying out welding work on the body:

- Welding work should only be undertaken by people with appropriate qualifications
- Before starting welding work, it is necessary to remove components which might contain gases posing a fire or explosion hazard, e.g. fuel system, or else to protect them with a fireproof cover against airborne sparks
- Welding, soldering and thermal bonding or the use of hot air in the direct vicinity of the high-voltage components, the high-voltage wires and on the high-voltage battery are not permitted. If a sufficient distance cannot be maintained, the components must be removed. The information in the vehicle-specific repair instructions must be observed
- Work on the high-voltage components may only be performed by qualified personnel
- Before welding work starts in the area of seat belts, airbag sensors or the airbag control unit, the components must be removed for the duration of the work
- Before starting welding work, cover the springs and spring bellows to protect them against welding beads. Springs are not allowed to be touched with welding electrodes or welding tongs
- No welding is allowed on mechanical units such as the engine, gearbox, axles
- Remove and cover the battery positive and negative terminal clamps
- Directly connect the earth clamp of the welding machine to the part to be welded. The earth clamp is not allowed to be connected to power units such as the engine, gearbox, axles
- The housings of electronic components (e.g. control units) and electrical wiring are not allowed to be touched with the welding electrode or earth clamp of the welding machine
- The electrodes are only allowed to be used with direct current via the positive terminal for welding. Always weld from bottom towards the top

Warning note

Incorrectly undertaken welding work can lead to a failure of safety-relevant components, and thus cause accidents.

Risk of injury

Welding in the area of the restraint systems (airbag or belts) can lead to these systems ceasing to function properly.

Welding in the area of child restraint systems is therefore prohibited.

Warning note

Special safety notes must be observed when working on electric vehicles. Failure to observe safety notes can result in a fatal electric shock.

Warning note

The voltage within the high-voltage vehicle electrics and high-voltage battery is life-threatening!

Touching damaged orange-coloured high-voltage wires and high-voltage battery may result in a fatal electric shock. The high-voltage system may be active even if the ignition is switched off!

- Never carry out any work on the high-voltage vehicle electrics, orange-coloured high-voltage wires, high-voltage components or high-voltage battery. Work on the high-voltage system may only be performed by qualified specialist companies with appropriate accreditation to perform such work
- Never modify, damage, dismantle or disconnect from the high-voltage system any of the orange-coloured high-voltage wires, high-voltage components or high-voltage battery
- Work in the vicinity of high-voltage components, high-voltage wires and on the high-voltage battery may not be carried out until after de-energisation. The high-voltage battery **cannot** be de-energised. The high-voltage disconnection may only be performed by suitably qualified and trained specialist staff
- If there is a fault in the high-voltage system, the drive is automatically deactivated where necessary, and a corresponding indicator may be displayed in the instrument cluster. Should this be the case, the drive will remain deactivated until the fault has been rectified by suitably qualified and trained specialist staff
- The Volkswagen guidelines must be observed when carrying out any work on the high-voltage system, in particular on the orange-coloured high-voltage wires, high-voltage components or high-voltage battery.

Practical note

Disconnect the battery prior to starting welding work.
Airbags, seatbelts, the airbag control unit and airbag sensors shall be protected against welding beads, and removed if necessary.

Information

The required safety notes can be requested. Please contact us (see [chapter 1.2.1 “Product and vehicle information for converters”](#)).

2.3.2.3 Welded connections

In order to achieve high-quality weld seams, the following basic recommendations are given:

- Thoroughly clean the areas to be welded
- Apply several short weld beads, rather than one long one
- Make symmetrical beads, in order to limit shrinkage
- Avoid making more than three welds at any one point
- Avoid welding in work-hardened areas
- Spot welds and stitch welding should be offset

2.3.2.4 Selection of welding process

The mechanical properties of weld seams depend on which welding process is selected, and on the geometry of the parts to be connected.

If welding overlapping metal panels, the welding process depends on the accessibility of the sides:

Accessible sides	Welding process
1	Shielding gas plug welding
2	Resistance spot welding

2.3.2.5 Resistance spot welding

Resistance spot welding is used for overlapping parts with access on both sides. Avoid spot welding of more than two layers of metal panels.

Distance between spot welds:

In order to avoid shunt effects, the specified distances between the spot welds must be maintained ($d = 10e + 10 \text{ mm}$).

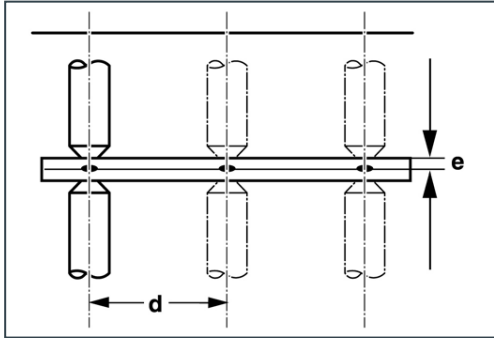


Fig. 1: Ratio between panel thickness and distance between welds

d Distance between spot welds

e Panel thickness

Distance from the edge of the panel:

In order to avoid damage to the molten core, the specified distances from the edge of the panel must be maintained ($L = 3e + 2 \text{ mm}$).

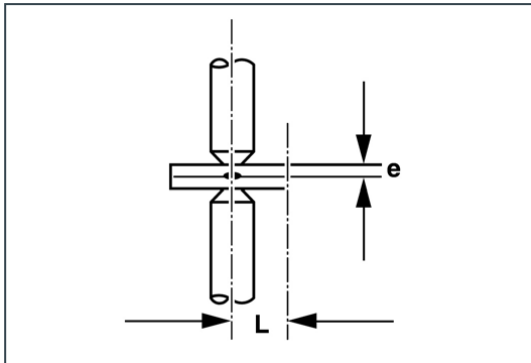


Fig. 2: Ratio between panel thickness and distance from edge

e Panel thickness

L Distance from the edge of the panel

2.3.2.6 Shielding gas plug welding

If overlapping panels can only be welded on one side, it is possible to achieve the connection by shielding gas plug welding or tacking. If the connection is achieved by punching or drilling and then plug welding, the drilling area must be deburred before welding.

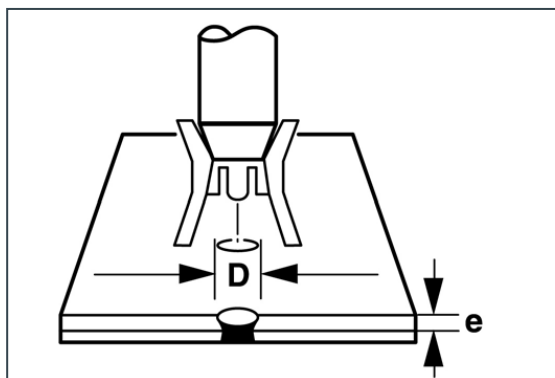


Fig. 1: Ratio between panel thickness and hole diameter

D – hole diameter [mm]	4.5	5	5.5	6	6.5	7
e – panel thickness [mm]	0.6	0.7	1	1.25	1.5	2

The mechanical quality can additionally be improved by using “elongated holes” ($l = 2 \times b$).

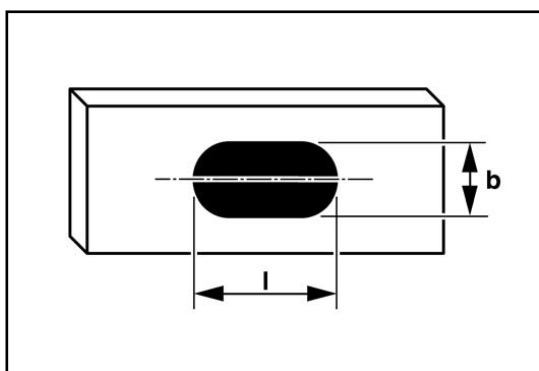


Fig. 2: Ratio between width and length of slots

b Width of slot

l Length of slot

2.3.2.7 Tacking

If panels are >2 mm thick, overlapping panels can also be connected by tacking
($30\text{ mm} < L < 40 \times e$; $d > 2 L$).

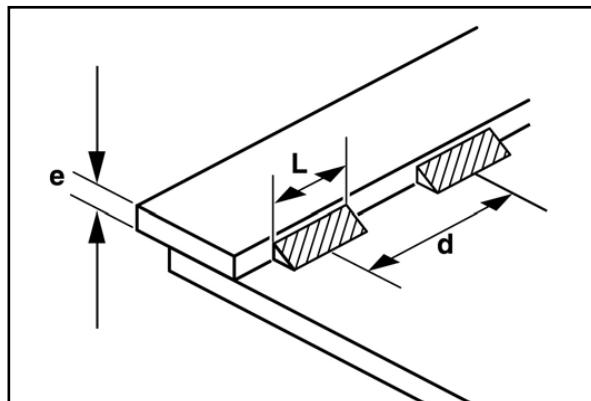


Fig. 1: Ratio between panel thickness and distance between welds

d Distance between tack welds

e Panel thickness

L Length of tack weld

2.3.2.8 Welding is not allowed

Welding is not allowed:

- On mechanical units such as the engine, gearbox, axles etc.
- On the chassis frame except if there is a frame extension
- On the A and B-pillars
- On the upper and lower chords of the frame
- In bend radii
- In the area of airbags
- Hole welding is only permitted in the vertical webs of the frame longitudinal member

2.3.2.9 Corrosion protection after welding

After all welding work on the vehicle, it is necessary to comply with the specified corrosion protection measures (see [chapter 2.3.2.10 "Corrosion protection measures"](#)).

2.3.2.10 Corrosion protection measures

Following conversion and installation work on the vehicle, surface and corrosion protection shall be applied to the affected points.

Practical note

Only the corrosion protection agents tested and approved by Volkswagen are allowed to be used for all corrosion protection measures.

2.3.2.11 Planning measures

Corrosion protection should be taken into account in the planning and design in the form of a suitable material selection and component design.

Information

If two different metallic materials are connected together by an electrolyte (e.g. moisture from the air) then this will give rise to a galvanic connection. The result will be electrochemical corrosion, and the less noble metal will suffer damage. The electrochemical corrosion will be all the greater the further apart the metals in question are in the electrochemical series.

Therefore, the components must have a suitable treatment or insulation applied to them in order to prevent electrochemical corrosion, or the corrosion must be kept at a low level by a suitable choice of materials.

Avoidance of contact corrosion by electrical insulation

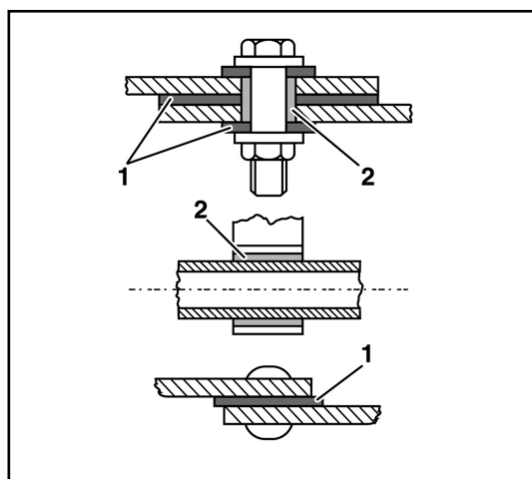


Fig. 1: Avoidance of contact corrosion

1 Insulating washer

2 Insulating sleeve

Contact corrosion can be avoided by using electrical insulation such as washers, sleeves or tubes. Avoid welding work on inaccessible cavities.

2.3.2.12 Component design measures

Design measures, in particular in the design of connections between the same or different materials, can be used for providing corrosion protection:

Corners, edges, beads and folds represent locations where dirt and moisture can collect.

Suitable surfaces, drains and the avoidance of gaps at component connections represent means by which corrosion can be counteracted by design measures.

Gaps at welded connections as a feature of the design, and how to avoid them.

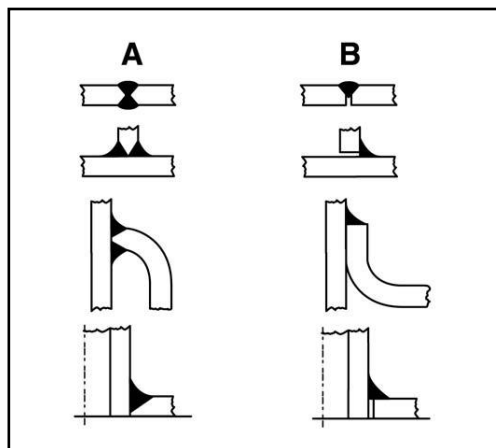


Fig. 1: Application examples of welded connections

A = Favourable	B = Unfavourable
(through-welded)	(gap)

2.3.2.13 Coating measures

It is possible to protect the vehicle against corrosion (see [2.3.2.10 "Corrosion protection measures"](#)) by applying protective coatings (e.g. galvanizing, painting or high-temperature zinc application).

2.3.2.14 Work on the vehicle

After all work on the vehicle:

- Remove drilling chips
- Deburr edges
- Remove scorched paint and thoroughly prepare the surfaces for painting
- Apply a primer to all bare metal parts, and paint them
- Apply a wax-based corrosion protection agent to cavities
- Carry out corrosion protection measures on the underbody and frame components

2.4 Interior

2.4.1 Modifications in the area of airbags

Modifications on the airbag system and the belt tensioner system as well as on and in the area of airbag components, the airbag sensors and the airbag control unit are not permitted. Please also refer to [chapter 4.1 “Vehicles for transporting persons with restricted mobility”](#). The interior fittings shall be designed so that the airbag deployment areas are left unobstructed (see also [chapter 3.1 “Interior”](#)). Information about the deployment zones of the airbags can be found the vehicle Owner’s Manual.

Warning note

Modifications or incorrectly performed work on seatbelts and seatbelt anchor points, belt tensioners or airbags or their cabling could impair the correct function of these components. They might be activated inadvertently or fail in the event of an accident.

2.4.2 Modifications in the area of seats

The strength data for seats available ex-works is only valid in conjunction with the original attachment system.

Warning note

Only fit seat covers or protective covers that are expressly approved for use in the vehicle.
The use of non-approved covers may prevent the side airbag from deploying.

Practical note

Modifications to the original series production condition can result in the withdrawal of type approval.
Country-specific laws, directives and approval regulations shall be observed!

Information

You will find detailed information on torques etc. in the workshop manuals.

Volkswagen AG repair and workshop information can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):

<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

2.4.2.1 Belt anchors

The converter is solely responsible for fitting additional belt points.

The necessary proof is to be provided by the converter. Country-specific laws, directives and approval regulations shall be observed!

2.4.3 Forced ventilation vent

Replacement measures must be created for vehicle modifications of any kind that can influence the standard forced ventilation vent.

This is important in several respects:

- Closing comfort of the doors
- Possible flow rate of the heating blower
- Pressure equalisation on airbag deployment

Ventilation slits must be installed in the partition wall in closed bodies with a partition wall.

In this case, make sure that the new forced ventilation cross sections are not smaller than the standard cross sections.

Air inlets and outlets are not allowed to be fitted in the immediate vicinity of sources of noise or exhaust gases.

2.4.4 Acoustic insulation

During conversions, make sure that the noise level of interior noise is not changed. Noise insulating materials can be installed to reduce the noise level in the vehicle interior. This must be manufactured from flame-retardant materials.

2.4.5 eCall Emergency System

In the event of an accident, the EU eCall Emergency Call Service can help to reduce the time it takes until emergency services arrive at the scene. Data is transmitted to the emergency response coordination centre via the OCU communication model.

The emergency call therefore does not depend on a mobile telephone being ready for operation, but does require a mobile phone connection and the possibility of locating the vehicle via GPS or Galileo. It is triggered automatically by the crash sensors or manually by the driver using the SOS button. The emergency call automatically goes to the nearest emergency response coordination centre.

General conditions:

The eCall Emergency System consists of the following components:

- Communication module (OCU)
- Emergency call button
- Microphone
- Emergency call loudspeaker
- Aerials for mobile network
- Global satellite navigation system
- and their connections and cables

As this is a certified system, no changes to components of the ecall Emergency System are permitted.

It should also be ensured in particular that the acoustic properties of the eCall Emergency System (emergency call loudspeakers and microphone) are not changed by constructional changes to the vehicle.

2.5 Electrics/electronics

Incorrect interventions in electronic components and their software may result in these no longer functioning as intended. Due to the networking of electronics, systems that were not modified can be affected. Malfunctions to the electronics can significantly impair the operational safety of your vehicle.

Work on or modifications to electronic components, in particular work on safety-relevant systems, is only allowed to be performed by a qualified specialist workshop, and by qualified specialist personnel who have the necessary specialist knowledge and tools for performing the necessary work.

Interventions in the vehicle electrical system/vehicle electronics can result in invalidation of the warranty/operating permit.

If modifications are made to the electrical system, take the vehicle to a VW workshop in order to delete the entries in the event memory at the completion of work. If a VAS tester is available, the event memory can also be deleted by trained personnel of the converter.

2.5.1 Lighting

2.5.1.1 Vehicle lighting systems

Comply with the country-specific registration provisions with regard to the complete lighting systems (lighting and turn signal systems).

Failing to comply can result in the operating permit being invalidated.

The headlights and tail light clusters are designed with LED technology as standard. The bulb failure monitor cannot be deactivated.

We recommend using Volkswagen Genuine tail light clusters or a product with E test symbol in

LED technology.

Please note that in the completed (converted) vehicle, it is necessary to comply with the add-on regulations and dimensions of all technical lighting equipment acc. to UNECE Regulation UNECE-R 48.

Applicable accordingly to all vehicle types:

ECE regulation	Lighting equipment	Vehicle dimensions	Comment
UNECE-R 48, 6.12	Parking lights	Permitted for vehicle dimensions: Width*: ≤2,000 mm and length: ≤6,000 mm	The parking light is not prescribed. It is not permitted in longer and wider vehicles, and shall be deactivated if necessary.
UNECE-R 48, 6.13	End-outline marker lights	1) Only permitted for vehicles with a width: ≥1,800 mm 2) Prescribed for vehicles with a width: >2,100 mm	Applies to all Transporter models
UNECE-R48, 6.18	Side marker lights	Prescribed for vehicles with a length: ≥6,000 mm	Permitted for other vehicles
UNECE-R48, 6.5	Side turn signals Category 6	Prescribed for N1/M2 vehicles with length >6,000 mm and N2 vehicles	Also permitted for other vehicles, any category 5 lights that are present should be taken out of service.
UNECE-R 48, Paragraph 6.7	3rd brake light		Since 1 November 2013, it is mandatory in Germany for M1 and N1 vehicles with a closed body!

*Vehicle width measured after conversion without mirror

If a vehicle becomes longer than 6 m or wider than 2 m without mirrors due to the body, the parking light is not permitted.
For these vehicles the parking light function must be decoded from the convenient control unit (onboard supply control unit (BCM)).

Category 5 side turn signals are installed on the Multivan (in the front wings).

These lights are only permitted for vehicles in class M₁ as well as for vehicles in class N₁ or M₂, providing they are not more than six metres long. This means the standard side turn signals are only sufficient for vehicles up to 3.5 t gross vehicle weight rating and up to 6 m in length.

2.5.1.2 Adjusting the headlights

The country-specific registration provisions apply.

The basic setting for the headlights must be put into effect and must be included in the configuration of the new construction status (e.g. fixed installations or add-ons or modifications to running gear components) of the vehicle.

It must be ensured that the adjustment range of the headlight range control complies with potential load levels.

For springs that deviate from the base vehicle and for settings for the headlight range control potentiometer (LWR Poti) that deviate from the vehicle wallet, these must be documented with regard to load levels, and must be attached to the vehicle wallet.

Information

More information about headlight settings can be found in the Volkswagen AG repair information / Maintenance Manual on the Internet:
<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

2.5.1.3 Special lights

2.5.1.3.1 Rotating light, yellow light

Comply with the country-specific registration provisions when installing special lights.

Please also comply with the following chapters during the conversion:

- [Chapter 2.2.1 "Permitted weights and unladen weights"](#)
- [Chapter 2.5.3 "Electrical interface for special vehicles"](#)
- [Chapter 2.5.4 "Vehicle battery"](#)

2.5.1.3.2 Roof-mounted turn signals

Comply with the country-specific registration provisions when installing special lights.

Please also comply with the following chapters during the conversion:

- [Chapter 2.2.1 "Permitted weights and unladen weights"](#)
- [Chapter 2.5.3 "Electrical interface for special vehicles"](#)
- [Chapter 2.5.4 "Vehicle battery"](#)

2.5.2 Electrical system

Please note:

For bodies and conversions with electromagnetic switching mechanisms (such as relays, magnetic switches, contactors and solenoid valves), these components must be equipped with integrated protective diodes (free-wheel diodes/anti-surge diodes), in order to exclude interference voltage peaks from the vehicle electrical system and the control units. If no protective diodes are integrated, these must be retrofitted antiparallel to the switch coil.

Information

Please refer to “Additional technical information”* in the CustomizedSolution portal for more information on protecting the control units integrated in the vehicle electrical system from interference voltage peaks of electromagnetic superstructures and modifications.

Please contact us (see [chapters 1.2.1.1 “Contact in Germany”](#) and [1.2.1.2 “International contact”](#)).

*Registration required.

2.5.2.1 Electrical wiring/fuses

The following points shall be complied with if routing modifications are required:

- Avoid routing over sharp edges
- Avoid routing inside excessively narrow cavities and close to moving parts
- No additional lines are must be fastened to brake hoses and brake lines
- Additional lines must remain at a sufficient distance from brake hoses and brake lines under all operating conditions, and must not touch or chafe against such brake hoses/lines under any circumstances
- Only lead-free PVC jacketed cables with an insulation limit temperature >105°C must be used.
- Connections must be made professionally and must be water-tight
- The cable shall be dimensioned according to the current drawn and protected by fuses

Max. continuous current [A]	Rated current of fuse [A]	Wire cross-section [mm²]
0 – 4	5*	0.35
4.1 – 8	10*	0.5
8.1 – 12	15*	1
12.1 – 16	20*	1.5
16.1 – 24	30*	2.5
24.1 – 32	40**	4
32.1 – 40	50**	6
40.1 – 80	100	10
80.1 – 100	125	16
100.1 – 140	175	25
140.1 – 180	225	35
180.1 – 240	300	50

* Shape C; DIN 72581 flat connector

** Shape E; DIN 72581 flat connector

Warning note

No additional electrical wiring or other lines are allowed to be secured to existing lines such as brake or fuel lines or cables, because standard holders might otherwise be overloaded. An independent attachment solution must be found.

2.5.2.2 Additional circuits

Additional circuits shall be safeguarded against the main circuit by means of suitable fuses.

All cables must be dimensioned according to the load, and protected against pulling off and the effects of impacts and heat.

When unprotected cables are routed in the area of the battery, these cables must be protected with special anti-cut hoses in accordance with series production (e.g. Aramid hose/Kevlar).

Information about sources for obtaining anti-cut hoses can be provided if required.

Please contact us (see [chapter 1.2.1.1 "Contact in Germany"](#) and [chapter 1.2.1.2 "International contact"](#)).

For bodies and conversions with electromagnetic switching mechanisms (such as relays, magnetic switches, contactors and solenoid valves), these components must be equipped with integrated protective diodes (free-wheel diodes/anti-surge diodes), in order to exclude interference voltage peaks from the vehicle electrical system and the control units. If no protective diodes are integrated, these must be retrofitted antiparallel to the switch coil.

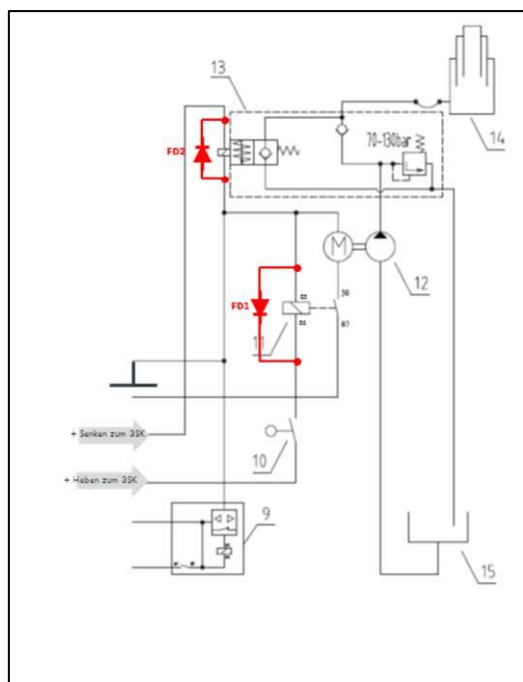


Fig. 1: Tipping control circuit

11-Electro-hydraulic tipping valve

12-Hydraulic pump with motor

13-Motor relay (lifting tipper bed)

FD1-Free-wheeling diode for motor relay

FD2-Free-wheeling diode for tipping valve

Practical note

For subsequent bodies and conversions for vehicles, it is essential to make sure there are no voltage spikes >150 V in the vehicle electrical system. For conversions, suitable measures must be taken to ensure this (e.g. by using protection diodes).

Information

Please refer to “Additional technical information”* in the CustomizedSolution portal for more information on protecting the control units integrated in the vehicle electrical system from interference voltage peaks of electromagnetic superstructures and modifications.

Please contact us (see [chapters 1.2.1.1 “Contact in Germany”](#) and [1.2.1.2 “International contact”](#)).

2.5.2.3 Retrofitting electrical devices

Note the following for retrofitting additional electrical consumers:

- The no-load current of the basic vehicle is optimised at 20 mA. Additional electrical equipment (e.g. data loggers) which is permanently connected to the permanent positive terminal 30 reduces the time after which the vehicle engine can be reliably started by discharging the starter battery.
Even 100 mA of additional no-load current drains 2.4 Ah per day from the battery
- If the electrical power requirement is higher, the alternators approved by Volkswagen for the vehicle shall be used
- No further loads are allowed to be connected to assigned fuses
- No additional cables are allowed to be connected to existing cables (e.g. with insulation-piercing terminals)
- Fuse electrical equipment adequately by means of additional fuses
- All installed electrical devices will be checked acc. to UNECE-R10 and will bear the “E” mark

Warning note

Incorrect intervention or installations in the vehicle electrics/vehicle electronics can impair their function. This can lead to a failure of components or safety-relevant parts and consequently to accidents or damage to the vehicle.

Practical note

The negative terminal of electrical consumers must always be located at the intended body earth and not at the negative battery terminal, as this can lead to falsification of the battery status detection by the on-board electronics.

Information

Furthermore interventions in the vehicle electrical system/vehicle electronics can result in invalidation of the warranty/operating permit.

2.5.2.4 Electromagnetic compatibility

Electromagnetic compatibility (EMC) is defined as the property of an electrical system enabling it to behave neutrally with full functionality in the vicinity of other systems. Active systems in the surrounding area are not disrupted by the system, nor is the system itself impaired.

Electrical interference in motor vehicle electrical systems is caused by the individual electrical loads. At Volkswagen AG, the factory-fitted electronic components have been checked for their electromagnetic compatibility in the vehicle.

When electrical or electronic systems are retrofitted, it is also necessary to check and demonstrate their electromagnetic compatibility. The devices shall possess a type approval in accordance with UNECE-R 10 and shall bear the “e” mark.

Volkswagen does not issue a manufacturer’s declaration for electromagnetic compatibility when additional devices are subsequently installed by converters.

Should you have any questions, please contact Volkswagen AG. Please refer to [chapter 1.2.1 “Product and vehicle information for converters”](#).

2.5.2.5 Mobile communication systems**1. Mobile phones**

Commercially available mobile phones may be operated in the vehicle interior. Observe the respective national regulations for the transmission powers during use. Information about the radio bands can be found in the current vehicle-related manufacturer's declaration.

An installation set with external aerial is recommended for an optimum transmission and reception quality and to connect to wireless networks outside of the vehicle. The appropriate interface is available for the mobile phone ex-works as special equipment.

2. Mobile phones for authorities and organisations with security tasks

Two-way radios complying with the technical directives of authorities and organisations with security tasks may be installed and operated in the vehicle with the appropriate installation set (according to the vehicle-specific manufacturer’s declaration).

Information

Additional information about the operation of mobile two-way radios is available in the “vehicle-specific manufacturer’s declaration” for the Multivan.

It is filed in the converter portal of Volkswagen AG under the heading: “Additional technical information”*.

*Registration required.

2.5.2.6 CAN bus

Warning note

Interventions in the CAN bus and connected components are not permitted.

The CAN bus must not be modified due to the networking and internal monitoring of electrical equipment (e.g. by interrupting, extending or “tapping”, and reading and writing). Any modification to the wiring harness in terms of length, cross-section or resistance could cause failure of safety-relevant components or result in a loss of comfort.

Internal and external vehicle diagnosis is possible via the OBD diagnostic connection (SAE 1962). Each control unit is self-diagnosis capable and has a event memory.

Communication with the control unit can be carried out using a suitable diagnostic system (e.g. Offboard Diagnostic Information System).

Practical note

The converter can use the external CAN bus interfaces on the CFCU to exchange predefined data with the BUS system of the basic vehicle (CIA 447 or J1939).

Outside of these interfaces and predefined data strings, no data may be exchanged with the internal data bus of the basic vehicle. Furthermore, no online interfaces may be connected to the above CAN BUS interfaces (an online interface is an interface that can potentially be connected to the Internet, such as *Wi-Fi, Bluetooth, *NFC, *NAD, etc.).

In case of non-compliance, the converter is required to have a new system test performed according to UN ECE R 155.

To prevent outside intervention in the vehicle control system, the vehicle manufacturers (OEM) are constantly implementing the UNECE regulations on cyber security (CS) and software update management system (SUMS).

If vehicles are modified or supplemented by converters following delivery by the vehicle manufacturer, the specifications from the UNECE regulations must also be observed and implemented.

* WLAN = wireless local area network

*NFC= near field communication (contactless data transmission using radio frequency identification (RFID) technology),

*NAD= network access device (telephone module)

Information

Your Volkswagen customer service department can provide you with further information.

2.5.2.7 Current and signal take-off of vehicle electrical system potentials

If an electrical interface is not available or, if it is not yet available, a current take-off may take place on a limited basis, taking into account the conditions specified in [chapter 2.5.2.2 “Additional circuits”](#).

Depending on the vehicle equipment,

the current take-off may take place at specific unoccupied fuse locations of fuse holder C.

Terminal 15 ignition, take-off for additional electrical equipment

At the free fuse location SC64 (see Fig. 1), the current take-off must be limited to 3 A and protected with a maximum of 5 A.

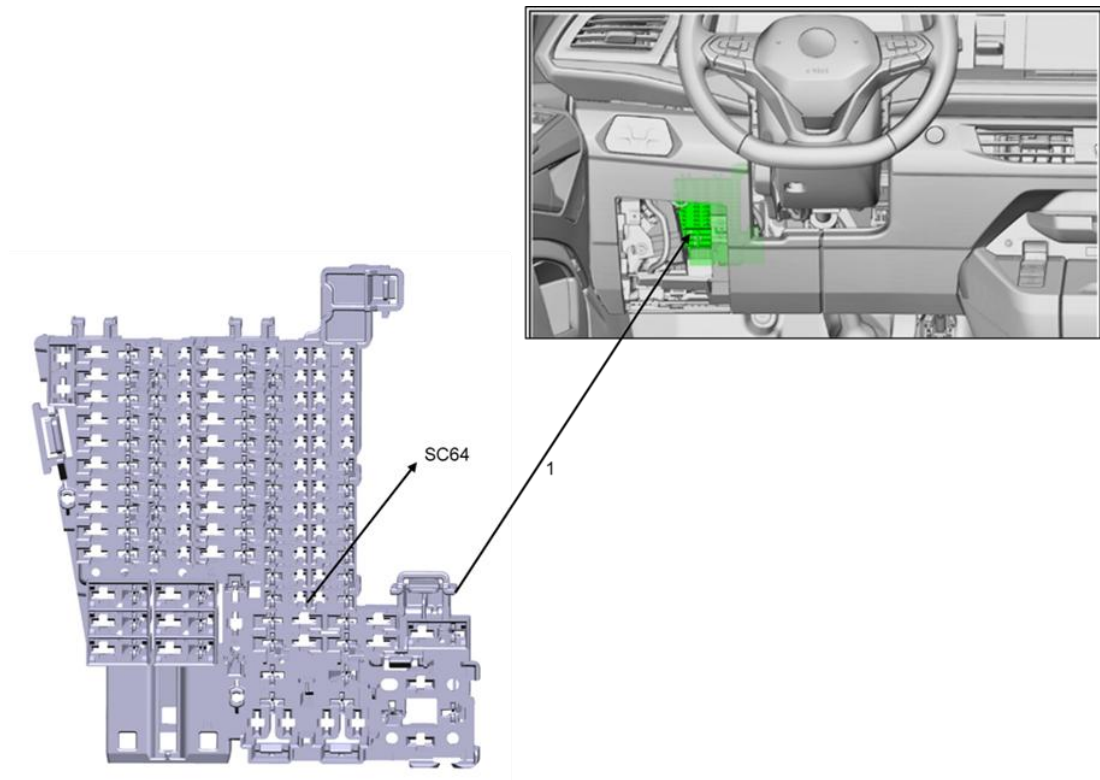


Fig. 1: Fuse holder C left of dash panel

Fuse holder C is located in the bottom left of the dash panel.

- Next to the steering wheel on left-hand drive models
- Behind the glove compartment on right-hand drive models

The exact position and description can be found in the Owner's Manual of your vehicle.

Terminal 30 permanent positive, take-off for small electrical equipment

The take-off for terminal 30 can be implemented at the free fuse location SC 15 (see Fig. 2) of fuse holder C.

The current draw must be limited to 3 A and protected with a maximum of 5 A.

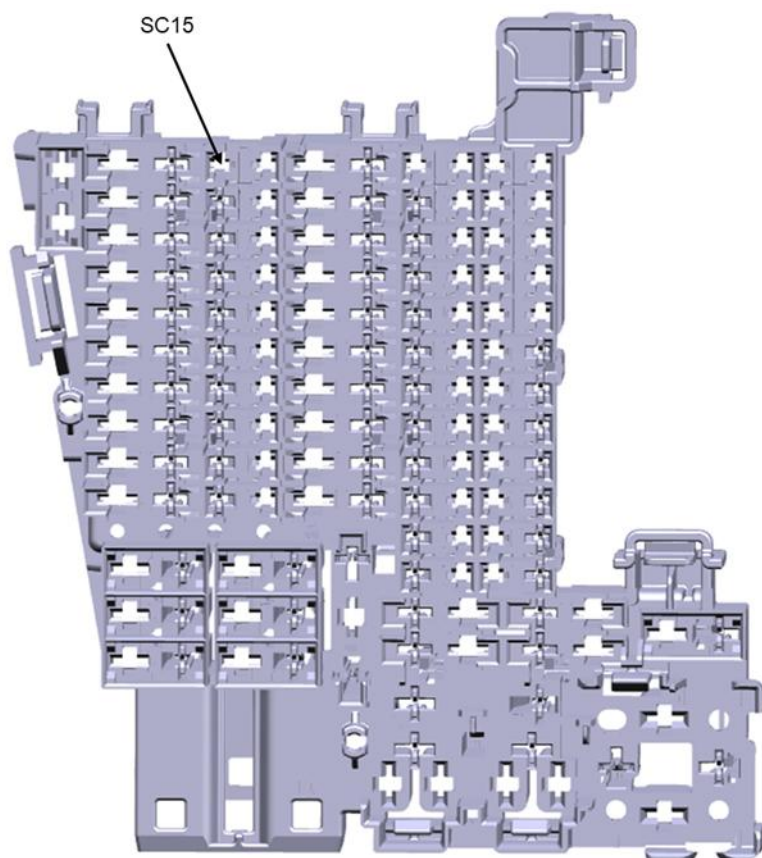


Fig. 2: Fuse holder C left of dash panel

The position of fuse holder C can be found in Fig. 2 or in the Owner's Manual of your vehicle.

Terminal 30 permanent positive, take-off for large electrical equipment

Petrol and diesel engines

The take-off for terminal 30 can be implemented at the free screw connection (see figure below, item 3) of the battery central fuse. The current draw must be limited to 100 A and protected with an additional fuse (inline fuse) with a maximum of 125 A. The protection must be implemented in the immediate vicinity of the battery (maximum distance of 100 mm).

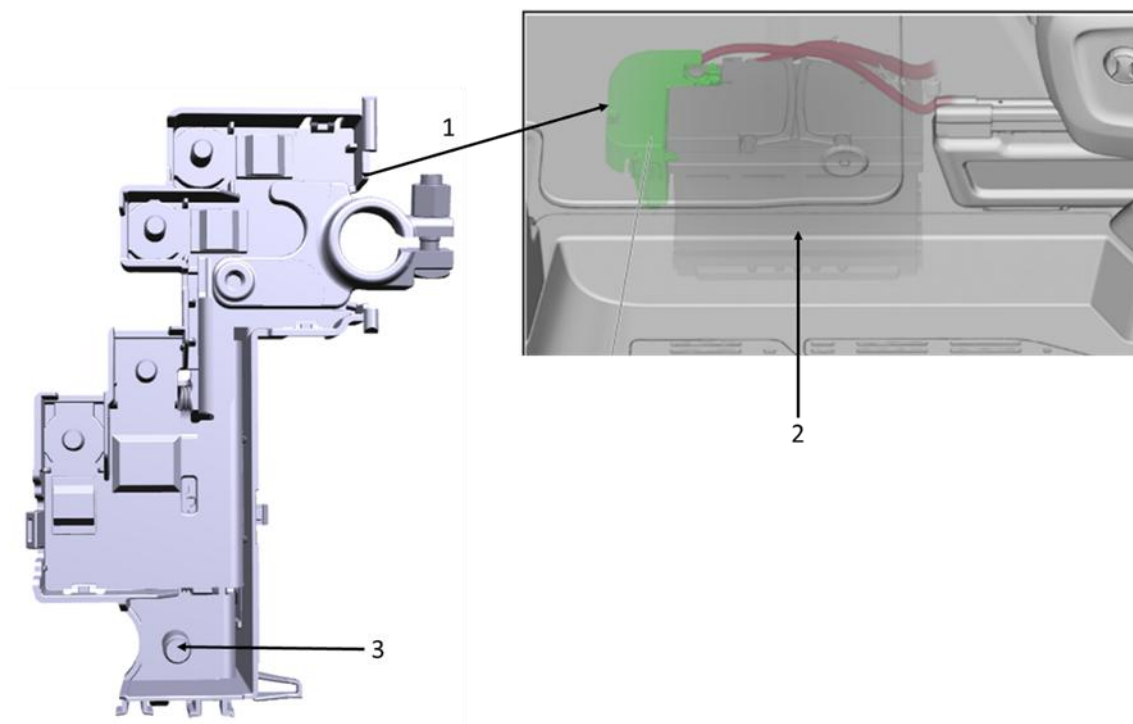


Fig. 3 Fuse holder A on the battery central fuse in the vehicle floor in front of the left-hand seat.

1= Fuse holder A

2= Battery

3= Free screw connection

Terminal 30 permanent positive – take-off for large electrical equipment**PHEV (Plug-In Hybrid Electric Vehicle)**

The take-off for terminal 30 can be implemented on the PHEV at the threaded bolt (see figure below, item 1) of the battery central fuse. The current draw must be limited to 100 A and protected with an additional fuse (inline fuse) with a maximum of 125 A. The protection must be implemented in the immediate vicinity of the battery (maximum distance of 100 mm).

See Fig. 4 for the position of the battery central fuse

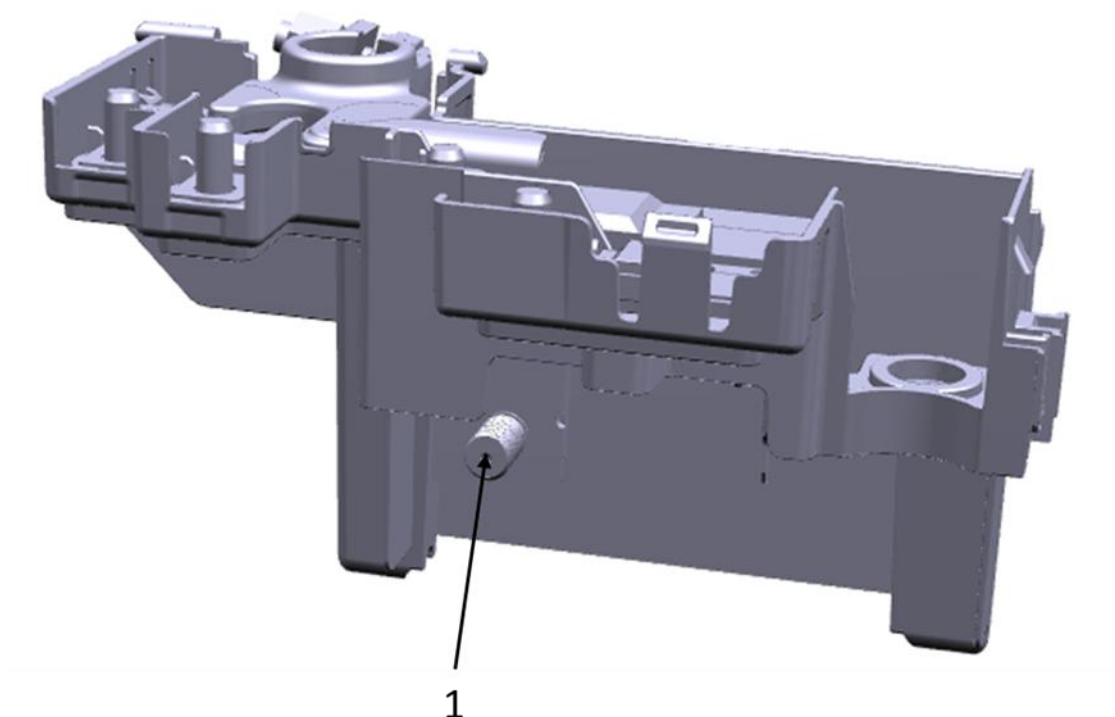


Fig. 4 Fuse holder A of the battery central fuse

2.5.3 Electrical interface for special vehicles

In principle, there is one interface for external use in special vehicles and by converters:

- Customer-specific functional control unit (CFCU): control unit with access to the vehicle's CAN network.

The interface can be ordered using the following equipment numbers (PR numbers):

See the note in the information field below.

PR number	Description
ISO	Without an interface for external use (without an electrical terminal strip), fitted as standard
IS2	Interface for external use (CFCU with converter programming, without an electrical terminal strip – without preparation for telematics)
IS9	Without an interface preparation for external use (without an electrical terminal strip)
IP1	Interface for external use (CFCU with converter programming, without electrical terminal strip – without preparation for telematics) for taxi/private hire car

2.5.3.1 General information on the interface for special vehicles

Basic requirements for using the interface:

- These interfaces are only allowed to be used by authorised specialist personnel
- Inappropriate interventions can result in damage to the vehicle and breakdowns, and may also invalidate the operating permit
- The parameters of the special vehicle control unit are only allowed to be set in consultation with Volkswagen
- Connections must be made properly (see [chapter 2.5.2.1 "Electrical wiring/fuses"](#)).
- Subject to technical modifications

The following points must be observed at all times:

- VDE guidelines for configuration and fitting of electrical wiring and components (cable cross sections, fuses etc.)
- Only components approved by Volkswagen are allowed to be used for adapting to the vehicle electrical system
- When using additional electrical equipment, the converter must ensure a balanced current supply
- EMC safety for connections after the interface is the responsibility of the company fitting out the vehicle
- The cable cross sections of the interfaces will be maintained throughout the entire circuit, i.e. no cross-section reductions are permitted after the interface
- Energy must only be supplied to the vehicle electrical system at potentials expressly provided for this purpose and will be fused externally in accordance with VDE guidelines
- All electrical wiring connected to the vehicle electrical system shall be reliably and durably protected against overload to battery "+"
- Earth potential: The specified potentials always refer to the vehicle body earth

Information

Volkswagen AG Workshop Manuals and current flow diagrams can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):
<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

2.5.3.2 Customer-specific functional control unit (CFCU)

The functional control unit enables close integration of the base vehicle and the body.

It makes it possible to provide almost 3,000 different signals from the base vehicle that, when required, are used to activate the body functions or are also connected in logic blocks (freely configurable).

Depending on the scope of equipment, the functional control unit also provides a standardised interface for the connection of a telematics system.

In order to adjust the functional control unit to the individual functional requirements of converters/customers, use the following description and the additional documents and instructions in the login area of the CustomizedSolution portal under Technical Information/The Crafter/Functional Control Unit.

The CFCU-(customer-specific functional control unit) includes:

- Programmable and configurable inputs and outputs (e.g. engine speed control)
- ASIL-B Ready (functional safety ISO 26262)
- Display of vehicle information as well as control of the converter functions
- Ex-works functions (taxi programming only with interface PR number IP1)
- Monitoring of the second battery for the preparation of the second battery

Digital inputs	16
Analogue inputs	8
Outputs	24

Information

All inputs and outputs can be loaded up to the respective specified rated values.

Corresponding technical rated values can be found in the technical customer documentation for the CFCU*.

Overloading can result in damage to the control unit, or even its destruction.

*CFCU: customer-specific functional control unit

The customer-specific functional control unit (CFCU) is located behind the glove compartment on the passenger side (see Fig. 1).

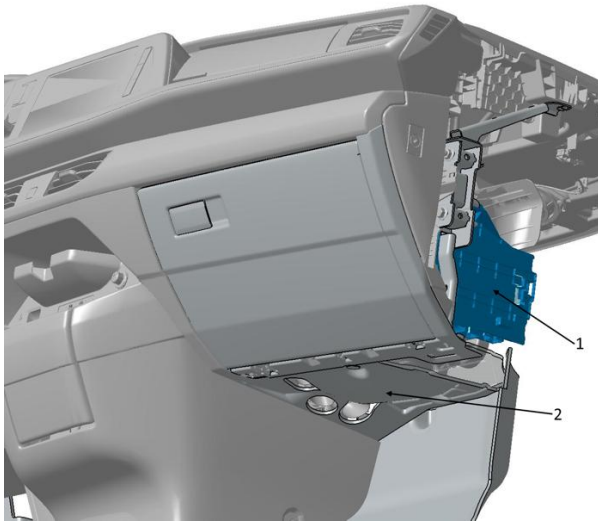


Fig. 1: Location of the CFCU, illustration for left-hand drive vehicle. On the right-hand drive vehicle, the CFCU is located on the other side accordingly.

1 = CFCU

2 = cover under the glove compartment

Practical note

If additional electrical consumers are installed, in particular factory-fitted optional equipment that use the second battery preparation, a positive overall charging balance shall be ensured by the converter.

Practical note

The converter can use what is known as the converter CAN* (also called J1939 or FMS** CAN) and the CANopen CAN (also called CIA 447) of the CFCU as an external CAN bus to communicate with the base vehicle (for read access to the CAN and in some cases write access as well).

CAN* Controller Area Network

FMS** Fleet Management System

Practical note

To prevent outside intervention in the vehicle control system, the vehicle manufacturers (OEM) implemented the UNECE regulations on cyber security (CS) and software update management system (SUMS). If vehicles are modified or supplemented by converters following delivery by the vehicle manufacturer, the specifications from the UNECE regulations must also be observed and implemented.

In the future, it must therefore be technically ensured that no unauthorised messages are written to the respective vehicle CAN via external interfaces or online. External messages on the CAN can affect the basic vehicle's vehicle control system.

The converter must ensure that no online control units may be connected to the CFCU, in order to minimise this risk.

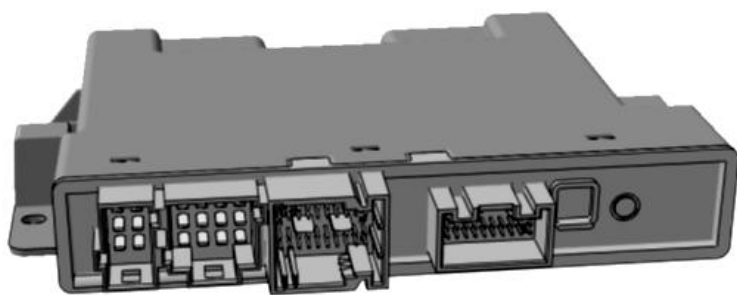


Fig. 2: View of customer-specific functional control unit

Interfaces

- CIA447
- J1939

Practical note

Please note: the specified basic functions may already be part of the “ex works functions” and could limit a required configuration and also previously unassigned inputs and outputs.

It is therefore important to clarify in advance whether the required additional CFCU functions are available and therefore usable!

Information

If you have any questions about the content of the configuration of the functional control unit (CFCU), please use the following email address: config-cs@volkswagen.de

Information

Technical documentation on the CFCU and further information regarding the requesting and processing procedure can be found on the CustomizedSolution portal via the link: <https://www.customized-solution.com/de/de/technische-produktinformationen/kfg/technische-information>

You must register on the CustomizedSolution portal in order to access this.

The configuration of the customer-specific functional control unit (CFCU) can be ordered via the CS portal.

2.5.4 Vehicle battery

The main battery is installed in the floor area on the left in front of the driver seat.

PR number	Designation	Battery capacity	Dimensions (Length × height × width) [mm]	Max. weight [kg]
J2D	AGM* absorbent glass mat battery	68 Ah/380 A	278 x 190 x 175	21

*AGM: absorbent glass mat battery

If a vehicle is not operated for a long time, its battery gradually discharges due to the electrical loads (e.g. clock, tachograph, 12 volt socket) and can suffer permanent damage.

To prevent this damage from occurring, check the battery open-circuit voltage in accordance with the maintenance cycle and charge the battery (see [chapter 1.2.6 “Recommendations for vehicle storage”](#)).

Practical note

Avoid totally discharging the battery. Totally discharging the battery may cause permanent damage to the battery.

The battery voltage must be higher than 12.25 V.

The battery voltage under load must never fall below 11.9 V. If necessary, an idle phase (electrical equipment off) must be implemented until the open-circuit voltage increases to 12.25 V.

2.5.5 Retrofitting of alternators

If additional electrical equipment is retrofitted, the increased power requirement can be met by using more powerful alternators.

The following equipment is available ex works for this purpose:

Order number (PR number)	Designation
NY0	Battery/alternator standard capacity
8GU	Alternator 140 A
8GV	Alternator 180 A
9G0	Alternator 230 A

Please use the PR number ordered to find out which alternator has been installed in your vehicle ex works. The alternator version installed is determined by the equipment ordered in the base vehicle. In hybrid vehicles, the PR number 8GJ DC/DC converter is fitted; **no** alternator can be modified.

If other alternators are to be retrofitted, the following points should be observed:

- Vehicle parts and their function should not be impaired by the installation of a generator
- The capacity of the battery and power supplied by the alternator must be dimensioned sufficiently
- The alternator circuit requires additional fusing (see [“Electrical wiring/fuses”](#))
- The cable cross-section should be dimensioned according to the current drawn (see [chapter 2.5.2.1 “Electrical wiring/fuses”](#))
- The higher power requirement can make it necessary to replace the starter/alternator warning harness. We recommend Volkswagen genuine parts for this
- Ensure that electrical wiring is routed correctly (see [chapter 2.5.2.1 “Electrical wiring/fuses”](#))
- The accessibility of the ancillaries installed and simple maintenance possibilities may not be impaired
- The necessary air supply and the engine cooling may not be impaired
- The guidelines of the equipment manufacturer for the compatibility with the base vehicle should be observed
- The Owner’s Manual and the maintenance manual for the ancillaries should be handed over when the vehicle is delivered

2.5.6 Driver assist systems

Warning note

Please note: Improper interventions in, or installations in, vehicle systems, safety-relevant components or driver assist systems can impair their function. This can result in failure or malfunctions of components or safety-relevant components. Accidents or damage to the vehicle may occur as a result.

In the case of semi-automated driving assistance systems that are part of the type approval, intervention in these systems will invalidate the type approval.

To ensure the correct function of the driver assist systems, it is imperative that the physical limitations of the vehicle described in [chapter 2.1 "Basic vehicle"](#) are observed.

Practical note

In vehicles with assist systems (such as the Lane Assist), bodies and conversions may cause falsification of the calibration. Flawless function of the front camera for driver assist systems and the radars would not be ensured. Once a body has been built or conversion made, a calibration of the driver assist systems installed must therefore be carried out by an authorised specialist workshop.

Information

More information on installation and removal of the assist systems, such as radars and multi-function camera can be found in the repair guideline (wheels, tyres, vehicle measurement, repair group 44, and electrical system, repair group 96) on the Internet at: **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):
<https://volkswagen.erwin-store.com/erwin/showHome.do>

* Information system from Volkswagen AG, fee required

Cameras and radars

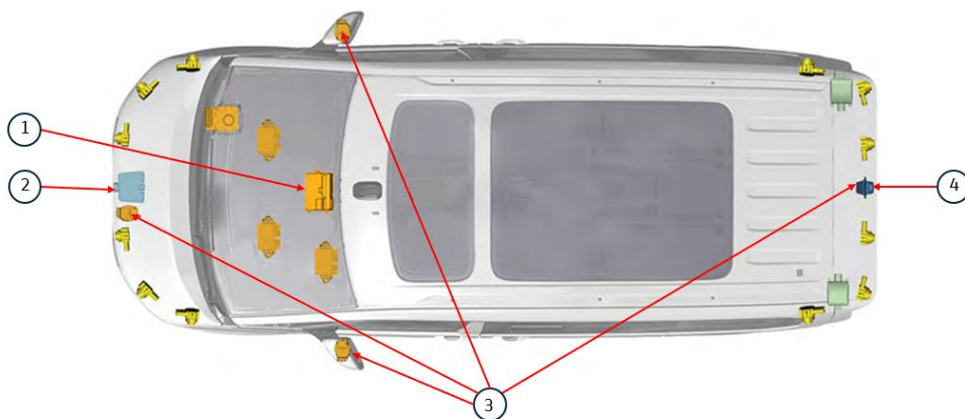


Fig. 1: Locations of the cameras and radars on the vehicle

- 1 – Front camera for driver assist systems
- 2 – Front radar sensor with adaptive cruise control unit
- 3 – Area View camera
- 4 – Rear view camera (without Area View)




Fig. 2: front camera for driver assist systems

- 1 – Front camera for driver assist systems (installed on the windscreen)
- 2 – Control unit integrated in the camera housing

Overhead view cameras – Area View

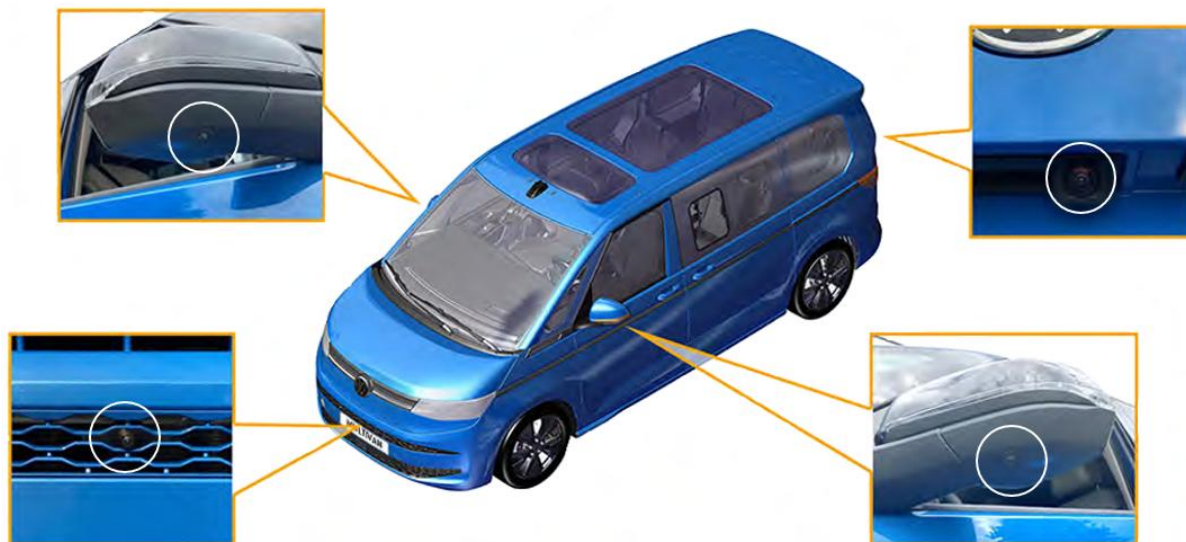


Fig. 3: Area View cameras

With Area View, four cameras are used to provide a surround view of the vehicle environment. All cameras in the Area View System are eEntry cameras.

Control units and sensors

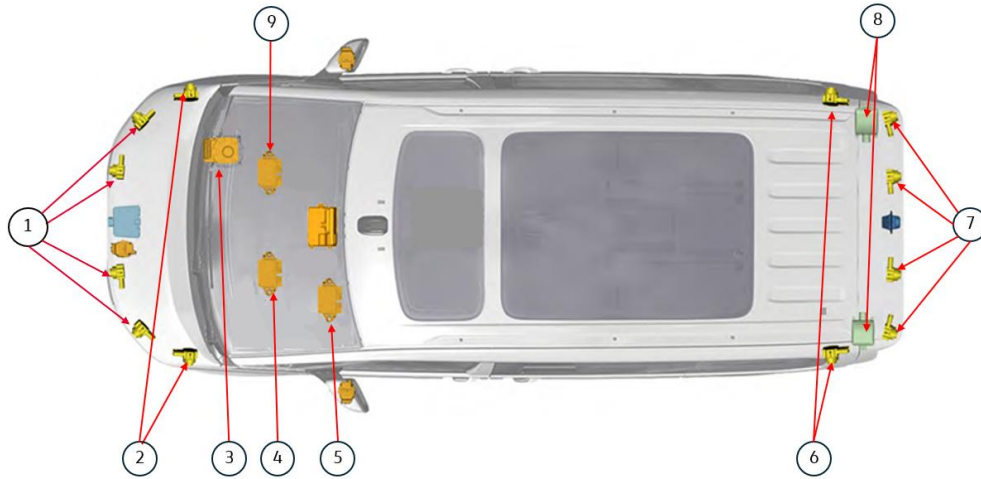


Fig. 4: Locations of the control units and sensors on the vehicle

- 1 – Front Park Distance Control sensor
- 2 – Park Assist steering sender
- 3 – ABS control unit
- 4 – Power steering control unit
- 5 – Parking aid control unit / park assist steering control unit
- 6 – Rear Park Assist steering sender
- 7 – Rear Park Distance Control sensor
- 8 – Lane change assist control unit
- 9 – Control unit for overhead view camera

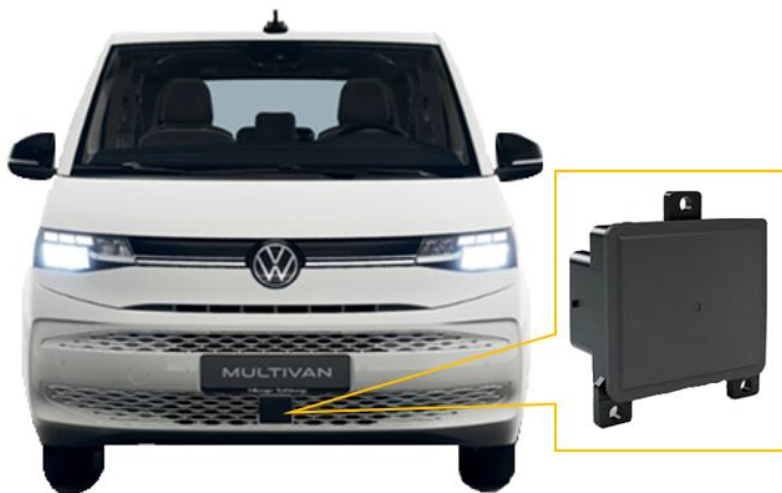


Fig. 5: front radar sensor with adaptive cruise control unit (mounted behind the cover at the bottom of the bumper)

The front radar sensors

The two front radar sensors are mounted in the corners of the bumper cover. They provide information for the following driver assist systems:

- “Travel Assist” including “Lane Assist” lane keeping system and “Emergency Assist” and Traffic Jam Assist
- Front Assist with warnings and braking on detection of vehicles, pedestrians and cyclists
- “Front Cross Traffic Assist” intersection assist
- Park Assist park assist steering and Park Distance Control at the front and rear



Fig. 6: front radar sensors

- 1 – Sensor 1 on the right in the direction of travel
2 – Sensor 2 on the left in the direction of travel

The rear radar sensors

The two rear radar sensors are mounted on the bumper cover. They provide information for the following driver assist systems:

- Lane change assist – Side Assist
- Assist system for reversing out of parking spaces – Rear Cross Traffic Alert
- Travel Assist
- Exit warning system



Fig. 6: rear radar sensors

- 1 – Sensor 1 on the left in the direction of travel
2 – Sensor 2 on the right in the direction of travel

Practical note

Adhesive films, particularly reflective ones, can negatively impact the function of the sensors installed in the vehicle. If it is necessary to equip the vehicle with a film, it must be ensured that the functions of the assist systems are not affected by this.

Practical note

The sensors may be displaced or damaged by collisions, e.g. when driving into or out of a parking space. This can result in the system switching itself off or becoming impaired.

Practical note

To ensure that the radar sensors function properly, the bumper covers must be kept free of snow and ice and must not be glued, painted or covered in the detection range of the sensors.

An overview of the driver assistance systems

The following assist systems are available in the vehicle after the equipment and sales specifications have been selected:

	Assist systems	PR number
	Lane Assist lane departure warning	6I1
	"Travel Assist" including "Lane Assist" lane keeping system and "Emergency Assist" and Traffic Jam Assist	6I6
	Light Assist main-beam control	8G1
	Multiple matrix beam (anti-dazzle LED main beam)	8G5
	Dynamic Road Sign Display	QR9
	Front Assist with warnings and braking on detection of vehicles	8J1
	Front Assist with warnings and braking on detection of vehicles, pedestrians and cyclists	8J3
	"Side Assist" lane change system including Blind Spot Monitor and Rear Traffic Alert	7Y1
	"Side Assist" lane change system including Blind Spot Monitor and Rear Traffic Alert (RCTA) and exit warning system	79H
	"Front Cross Traffic Assist" intersection assist	JX1
	Electronic Cruise Control System (CCS)	8T2
	Adaptive Cruise Control with Stop & Go	8T3
	Speed limiter (LIM)	LT1
	Speed limiter and predictive speed limiter (pLIM)	LT2
	Park Distance Control at the front and rear	7X2
	Park Assist park assist steering and Park Distance Control at the front and rear	7X5
	Distraction and fatigue detection system	EM2
	Tyre Pressure Monitoring System	7K1
	Intermittent windscreen wiper operation with light and rain sensor including USB connection for dashcam – in cover	8N6

Key

2.5.6.1 Parking aids

The following assist systems are available to help with parking:

- Park Distance Control at the front and rear PR number 7X2
- “Park Assist Plus” park assist steering PR number 7X5



Fig. 1: position of the front PDC sensors

1 – PDC sensors for front parking aid (Park Distance Control)

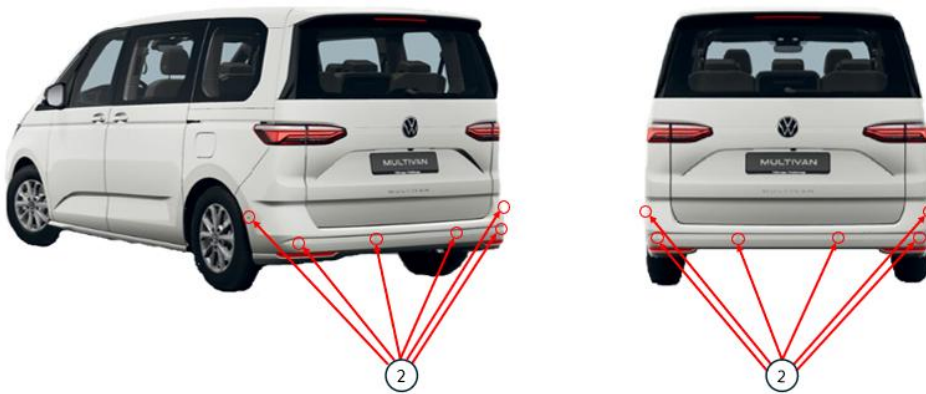


Fig. 2: location of the rear PDC sensors

2 – PDC sensors for rear parking aid (Park Distance Control)

At Volkswagen, the parking aid ensures compliance with UNECE R 158 (reverse travel equipment). For this reason, each vehicle is always fitted with Park Distance Control ex works.

These systems monitor their surroundings using up to 12 ultrasound sensors, known as PDC sensors. These are installed on the rear and, where applicable, also on the front of the vehicle. See figures above.

Practical note

In the event of superstructures and modifications:

- Add-on parts in the detecting range of the ultrasound sensors can impair the function of the parking aids (e.g. attachments on the towing bracket, steps or bumper guard).
In the event of add-on parts or conversions, make sure that the ultrasound sensors are not impacted by the attachments.
- If the bumper is painted subsequently, this must not be done with the ParkPilot ultrasound sensors installed. The coat of paint will impair the transmission and reception of the ultrasound signals.

Information

Different ultrasound sensors are available for the bumper covers:

- Non-paintable sensors for grained or black-painted bumper covers
- Sensors prepared for paintwork that will be painted in the colour of the vehicle
- Sensors already painted in the colour of the vehicle

Practical note

Sensors that have already been painted are not allowed to be repainted.

Sensors prepared for paintwork must be painted before installation to ensure the function of the sensors over their service life. You can obtain sensors prepared for paintwork and painted sensors in various colours from your authorised repairer. Non-paintable sensors for grained bumper covers must not be painted.

The coat thickness of the whole painted surface on the membrane must not exceed 125 µm so that the sensor function is not impaired. This also applies to multiple paint systems and the cathodic dip coating (CDP coating). The thickness of the cathodic dip coating is between 14 µm and 22 µm.

To ensure that the sensors function correctly, the coat thickness must therefore be checked at random.

During painting, make sure that not only the membrane, but also the cylindrical sensor membrane edge is coated evenly with paint at least 2 mm all-round.

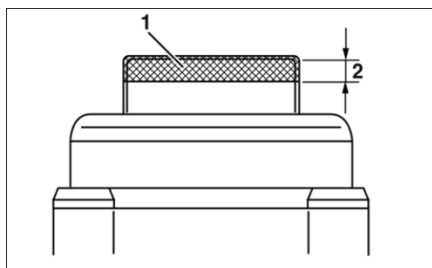


Fig. 1: Painting area of cylindrical sensor membrane edge

1 – Painting area

2 – Paint coat thickness max 125 μm

Practical note

The paint coat is not allowed to be sanded off mechanically. This could damage the chrome or CDP coat or the sensor membrane.

During the CDP primer process, the paint is not allowed to be removed chemically. This could damage the CDP coat and it can no longer be applied later on. Chemical or mechanical reworking is also not permitted.

2.5.7 Earth points

Use the earth points provided by Volkswagen for subsequent electrical add-ons or installations to ensure an optimum earth connection to the basic vehicle.

Warning note

The use of other earth points can lead to malfunctions in safety systems. This can lead to a failure of components or safety-relevant parts and to fault messages in the instrument cluster.

A maximum of 4 terminals are allowed to be screwed to an earth point.
The earth points of the safety systems are not allowed to be used for bodies.

Information

A general overview and more detailed information about earth points can be found in the current wiring diagram.

Volkswagen AG repair and workshop information can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):

<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

Please contact us if you have any further requirements (see [chapters 1.2.1.1 "Contact in Germany"](#) and [1.2.1.2 "International contact"](#)).

2.6 Engine peripherals/drive train

In the event of modifications to noise-relevant components such as the engine, exhaust system, tyres, air intake system etc., noise measurements shall be carried out acc. to EC Directives. The permitted values are not allowed to be exceeded.

The national regulations and directives apply.

Components for sound insulation that are installed as standard must not be modified or removed (see also [chapter 2.4.4 "Acoustic insulation"](#)).

2.6.1 Engine / drive train components

- No modifications to the engine air intake system are permitted
- Subsequent solutions regarding engine speed control are not possible
- Modifications to the cooling system (radiator, radiator grille, air ducts etc.) are not permitted
- Keep cooling air intake areas clear

2.6.2 Drive shafts

The correct configuration and implementation of a modified powertrain prevents noise and vibration, and should only be performed by a company which is qualified to build drive shafts.

Only genuine Volkswagen parts should be used.

2.6.3 Fuel system

No modifications are permitted to the fuel system, and any such modifications may result in invalidation of the vehicle's operating permit.

If the fuel system has to be modified for the conversion, the converter is solely responsible for the work being carried out correctly, including all the components and materials used.

A new operating permit must be applied for from the registration authority.

Comply with the following points if making any modifications to the fuel system:

- The whole system must be permanently leak-proof in all operating conditions.
- Ensure good quality refuelling if modifications are made to the tank filler pipe, and avoid any siphon effect in the pipe routing.
- All components that come into contact with fuel shall be suitable for the particular type of fuel used (e.g. petrol/diesel/ethanol additive etc.) and the ambient conditions in the installation location.
- Hoses must retain their shape and remain adequately stable throughout the service life, in order to ensure that there is no constriction in the cross section (e.g. hoses acc. to DIN 73379-1).
- Multi-ply hoses should be preferred.
- Install reinforcing support sleeves at the connections between hose sections so as to prevent any constriction at the clip connection and to guarantee leak-tightness.
- At the connections, use spring-type clips which automatically compensate for possible settling behaviour of the material and to maintain the preload. Hose clips with worm threads must be avoided.
- All parts of the fuel filler system must be routed at a sufficient distance from moving parts, sharp edges and components at high temperature, in order to avoid damage.
- In vehicles with petrol engines (also applies to plug-in hybrid vehicles), the activated charcoal filter is located directly on the fuel tank. The position of the activated charcoal container and its purge line to the engine must not be changed. The same applies to the position of the fresh air intake in the wheel housing.
- In the case of plug-in hybrid vehicles, a shut-off valve (FTIV: fuel tank isolation valve) and a pressure sensor are also integrated on the fuel tank. The entire ventilation concept for the fuel tank must be left unmodified.
- Do not attach heat-conducting components or components that restrict the installation space.
- Modifications to the fuel pump, fuel line length and fuel line routing are not permitted. Modifications to these mutually matched components can impair the function of the engine.
- Modifications to the body in the area of the fuel tank require the fuel tank to be removed first.
- If the converter replaces the standard tank with a different fuel tank, it must be ensured that the ground clearance with the new tank is not less than that with the standard tank. Exceptions are possible for vehicles for special applications (e.g. vehicles for transporting people with disabilities). Please contact us (see [chapters 1.2.1.1 "Contact in Germany"](#) and [1.2.1.2 "International contact"](#)).

Comply with the workshop manuals of Volkswagen AG.

Information

Volkswagen AG repair and workshop information can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):

<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

2.6.4 Exhaust system

Modifications to the exhaust system up to the centre silencer and in the area of the components for exhaust treatment (catalytic converter, lambda probe etc.) are never permitted.

If a modification is required to the exhaust system for the add-on/removal/conversion nevertheless, this can have effects which are relevant to registration. Please contact us in advance regarding the scope of your conversion so that we can advise you.

We recommend that you use VW genuine parts and comply with the workshop manuals of Volkswagen AG.

Information

You will find further information on installation and removal of the exhaust system on the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):
<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

Information

Country-related regulations and guidelines shall be complied with

Exceptions require the approval of Volkswagen AG before the conversion, and shall be documented in a registration report detailing the modifications and adjustments made.

Please contact us before starting your conversion (see chapters 1.2.1.1 “Contact in Germany” and 1.2.1.2 “International contact”).

Warning note

Attention! Danger of fire!

The lengths and routings of the exhaust system have been configured optimally with regard to their temperature properties. Modifications may result in relatively high to extreme heating of the exhaust system and the surrounding components (drive shafts, fuel tank, floor panel etc.).

2.6.4.1 Exhaust system (MAR*)

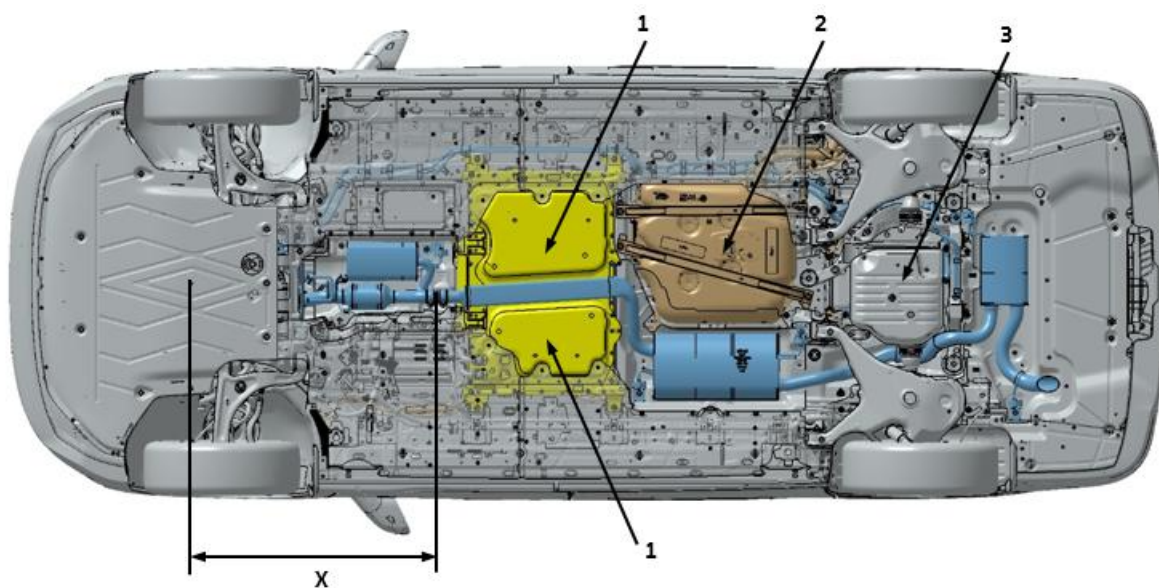


Fig. 1: Exhaust system, long MAR* overhang with PHEV (plug-in hybrid electric vehicle) (illustration: drive type 4x4, 130 kW)

1: High-voltage battery

2: Fuel tank

3: Electric motor for the electric rear axle

X: Area in which modifications are not permitted

*MAR: emission control module

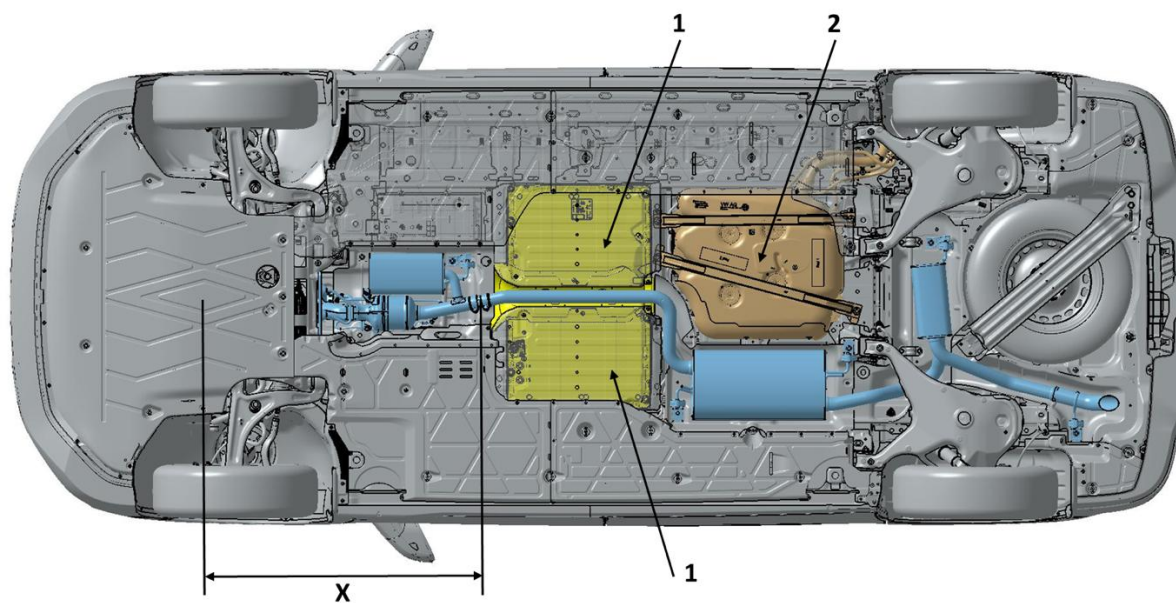


Fig. 2: Exhaust system, short MAR* overhang with PHEV (plug-in hybrid electric vehicle) (illustration: drive type 4x2, 160 kW)

1: High-voltage battery

2: Fuel tank

X: Area in which modifications are not permitted

*MAR: emission control module

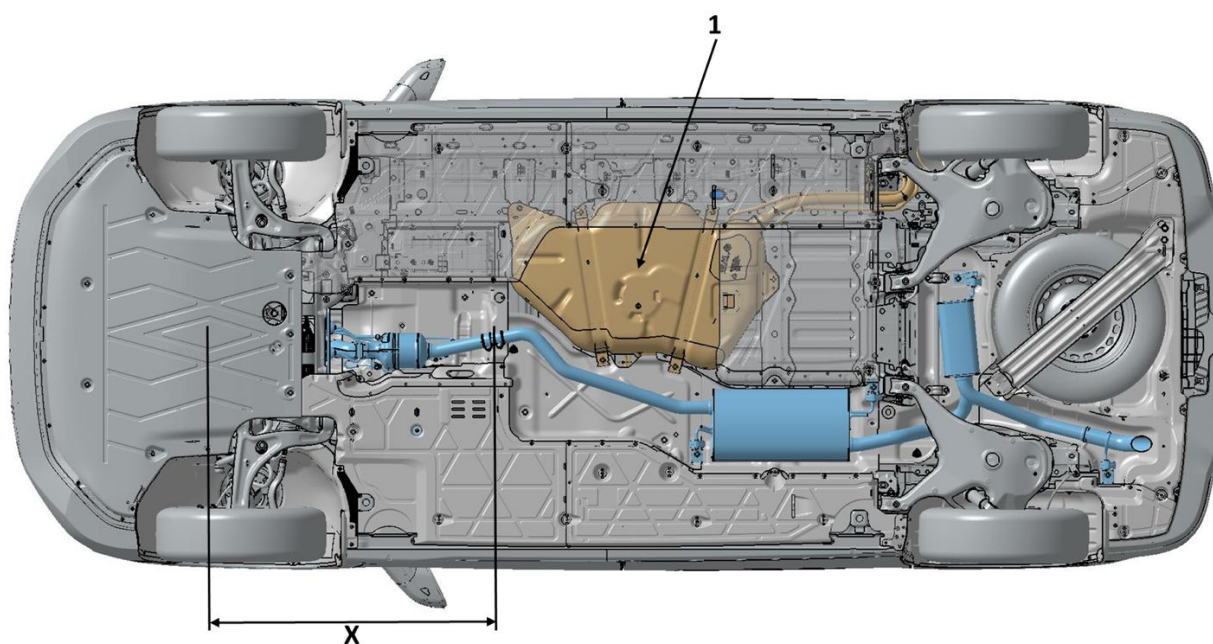


Fig. 3: Exhaust system, short MAR* overhang (illustration: drive type 4x2, 100 kW TSI)

1: Fuel tank

X: Area in which modifications are not permitted

*MAR: emission control module

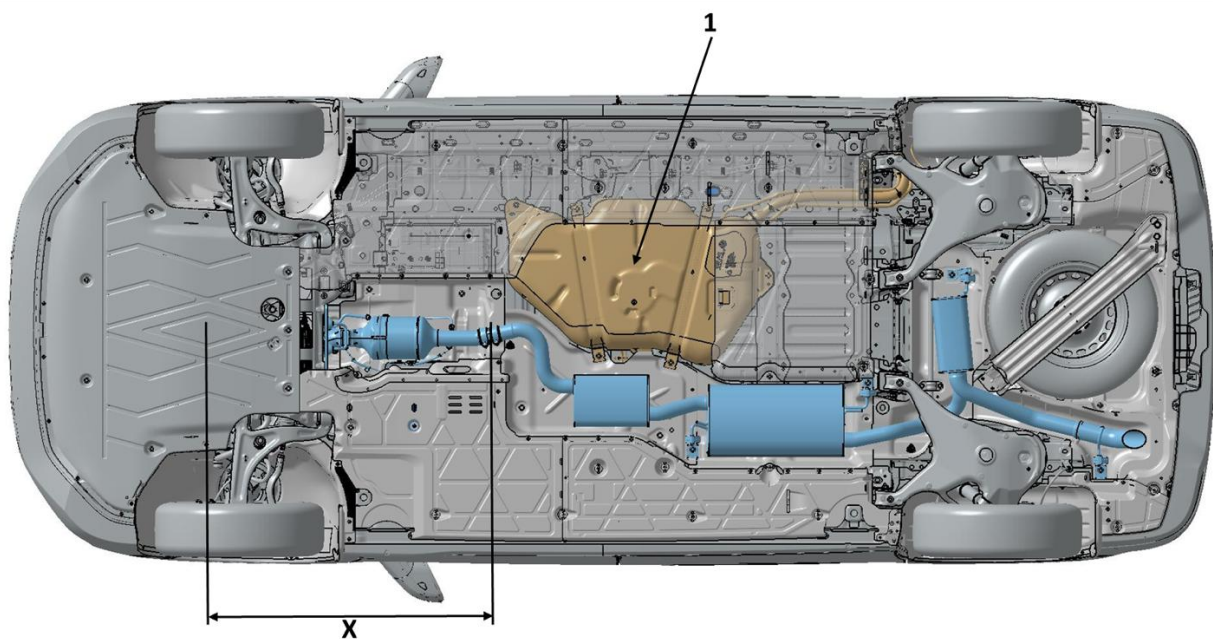


Fig. 4: Exhaust system, short MAR* overhang (illustration: drive type 4x2, 150 kW TFSI)

1: Fuel tank

X: Area in which modifications are not permitted

*MAR: emission control module

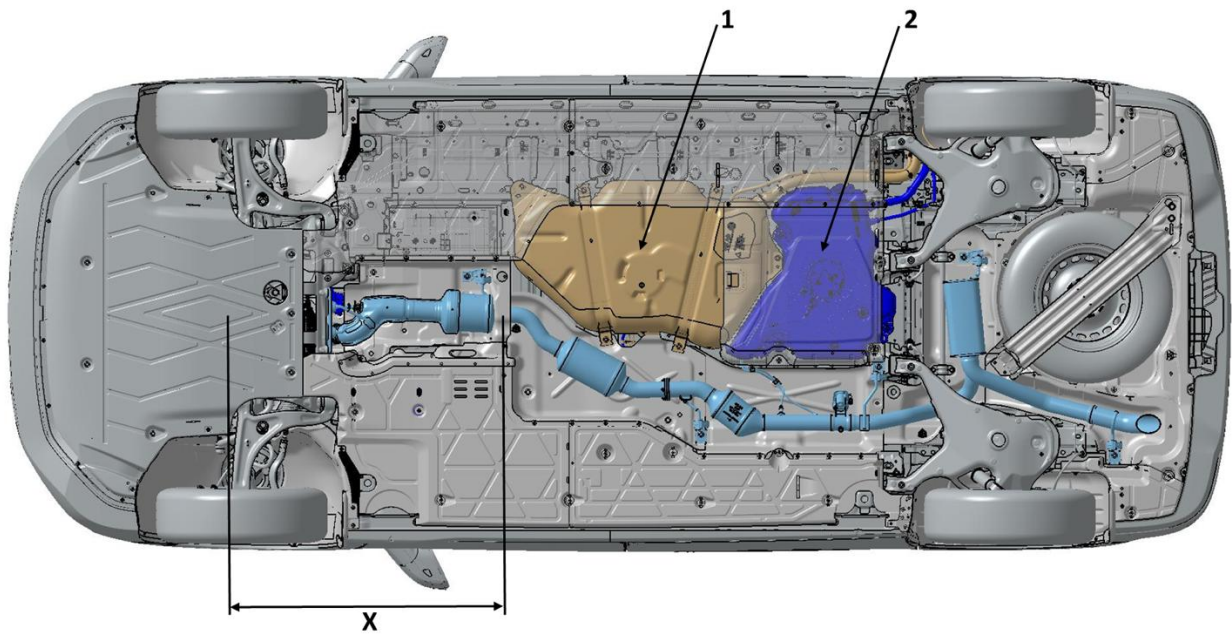


Fig. 5: Exhaust system, short MAR* overhang (illustration: drive type 4x2, 110 kW TDI)

1: Fuel tank

2: AdBlue tank

X: Area in which modifications are not permitted

*MAR: emission control module

Modifications to exhaust systems with an SCR system are not permitted under any circumstances. Neither the geometry nor the position of the sensors are allowed to be changed.

If a modification to the exhaust system due to body design, removal or conversion is nevertheless required, this can have consequences relevant to approval. Please contact the converter's support team in advance regarding the extent of your conversion so that we can advise you.

Changes as a result of add-ons or conversions are only possible outside of the SCR emission control system area indicated by X (see Figs. 1 to 5).

Practical note

When working on lines carrying AdBlue®, comply with the workshop manuals from Volkswagen AG. Otherwise, AdBlue® could crystallise and lead to damage to system components.

2.6.5 SCR system (EU6)

To meet EU6 emissions regulations for diesel engines, engines are available ex-works with different performance levels with the SCR system. Selective Catalytic Reduction (SCR) is a process used in automotive engineering for diesel vehicles to reduce emissions.

The SCR catalytic converter selectively converts the nitrogen oxide (NOx) exhaust gas component into nitrogen and water. This conversion is undertaken using AdBlue®, a synthetically manufactured, aqueous reducing agent. AdBlue® comprises 32.5 per cent high-purity urea and demineralised water. The AdBlue® solution is not mixed with the fuel, but carried in a separate tank.

From here, the AdBlue® is injected continuously into the exhaust gas line in front of the SCR catalytic converter. The AdBlue® reacts with the nitrogen oxides in the SCR catalytic converter and is split into nitrogen and water. The dosing is determined by the exhaust mass flow. The engine management system is informed by an NOx sender after the SCR catalytic converter and ensures exact dosing. The AdBlue® reducing agent is non-poisonous, odourless and water-soluble.

2.6.5.1 Installation position of the AdBlue® tank in the vehicle

The AdBlue tank is found at the rear of the underbody, on the left (in the direction of travel).

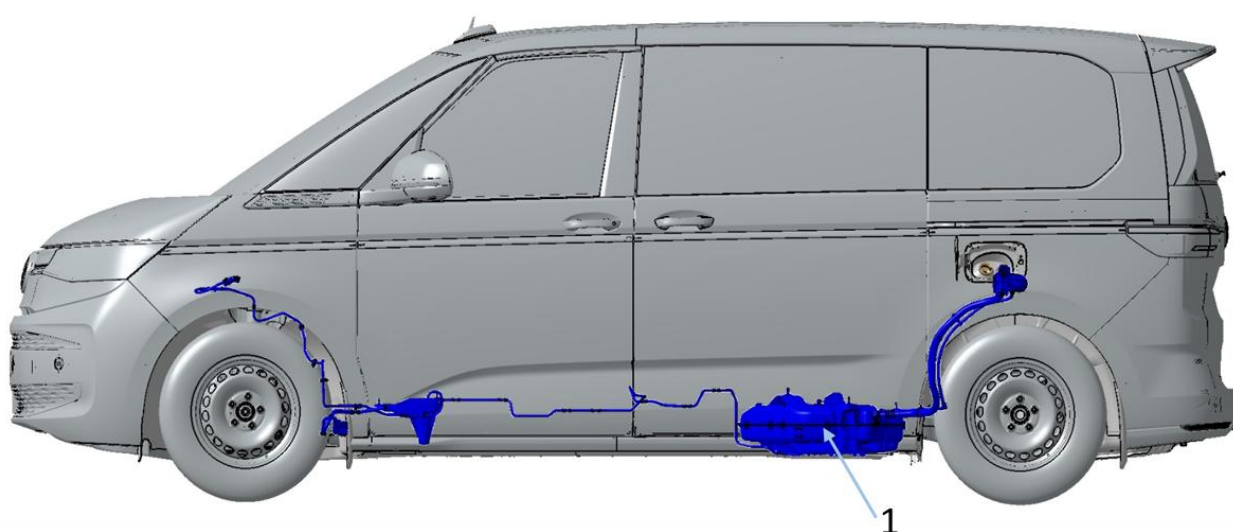


Fig.1: Installation position of the AdBlue tank on the vehicle/1 AdBlue tank

The SCR system, which consists of an AdBlue tank, line and metering valve, forms an optimised electrical-hydraulic unit. The location of the reducing agent tank, the heated metering line and their relative position to the vehicle shall not be changed ([see chapter 2.6.4 “Exhaust system”](#)).

2.6.5.2 Filling opening of the AdBlue tank

The filling opening of the AdBlue tank is located behind the tank flap next to the fuel filling opening.

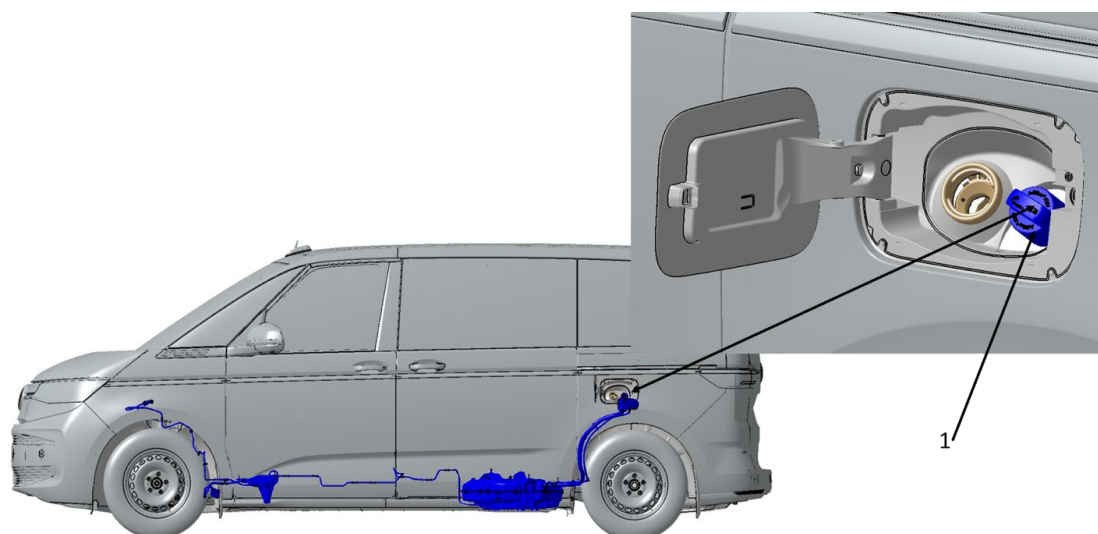


Fig.1: Filling opening of the AdBlue® tank in the engine compartment (schematic diagram)/single filler neck of the AdBlue tank

Practical note

AdBlue® attacks surfaces such as painted surfaces, aluminium, plastics, clothing and carpets. If AdBlue® is spilled, wipe it up as quickly as possible with a damp cloth and plenty of cold water. Remove crystallised AdBlue® with warm water and a sponge.

More information about AdBlue® is available in ISO standards ISO 22241-1 to 5.

Practical note

To ensure the purity of AdBlue®, never reuse AdBlue® that has been extracted from the reducing agent tank.

Comply with the country-specific laws and regulations regarding correct storage and disposal.

Information

More information and safety instructions for the SCR system can be found in the Owner's Manual for your vehicle and the Workshop Manuals of Volkswagen AG on the Internet:

<https://volkswagen.erwin-store.com/erwin/showHome.do>

2.7 Add-ons/units

2.7.1 Roof carriers

Roof loads raise the centre of gravity of the vehicle and lead to a high dynamic axle load shift. Also, there is greater body lean when driving on rough roads and when cornering. The vehicle handling is significantly impaired.

For this reason, roof loads should be avoided if at all possible.

At least two base carriers are required to secure the roof load! In the case of very long objects, another base carrier must be used at the rear mounting point. The maximum permissible roof load of 100 kg must not be increased if another base carrier is added.

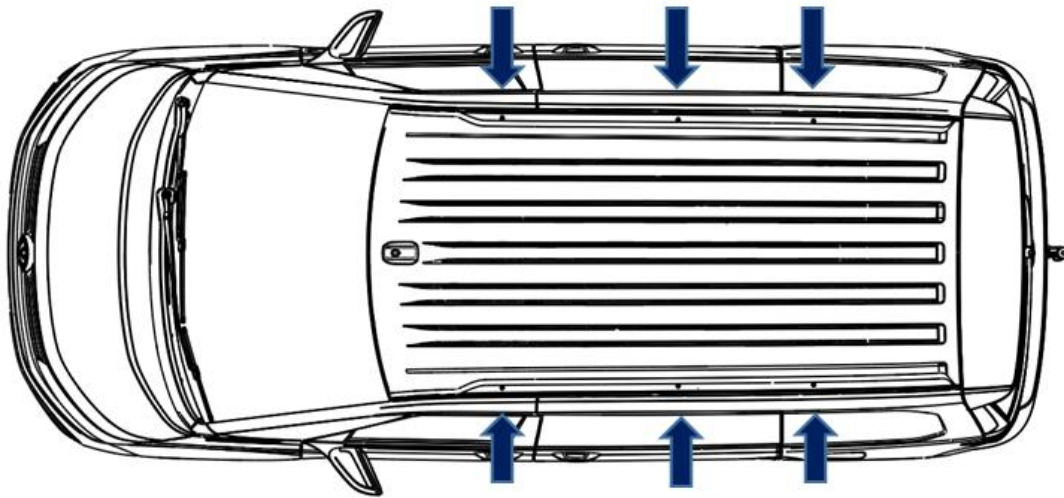


Fig. 1: Standard roof mounting points

2.7.2 Towing brackets

2.7.2.1 Maximum trailer weights

Only equipment approved for the vehicle may be used as towing brackets.

Towing brackets (ball hitches) can be ordered as optional equipment ex-works using the following PR numbers:

- PR number 1M6: towing bracket, mechanically swivelling and electrically triggered
- PR number 1M9: towing bracket, mechanically swivelling and electrically triggered, with trailer manoeuvring system
- PR number 1D7*: preparation for towing bracket

Maximum trailer weight 750 kg unbraked and 1,600 to 2,000 kg braked (depending on engine) with 12% hill climbing ability. The gross vehicle weight rating may not be exceeded.

The maximum permitted draw bar weight is 80 kg.

The max. permitted gross combination weight specified in the papers must not be exceeded. The actual trailer weight is not allowed to exceed the gross vehicle weight of the towing vehicle.

* Only in markets without UNECE requirements

2.7.2.2 Retrofitting a towing bracket

Comply with the following points when retrofitting a towing bracket:

- When fitting a trailer towing coupling in the EU, the specified installation dimensions and clearances in the current version of UNECE-R 55 must be observed. Any other applicable national regulations must be taken into account.
- The necessary clearance of the trailer behind the towing vehicle must be guaranteed (UNECE-R 55).
- The vehicle shall be presented to a motor vehicle test centre with responsibility for this matter.
- No factory-fitted extension to the towing bracket is available.
- There are attachment points in the vehicle longitudinal members.
- The gross vehicle weight rating depends on the engine and must be determined before retrofitting.
- Unspecified details shall be selected in a reasonable manner.
- The test of dimensions and angles shall be undertaken with suitable length and/or angle measuring instruments.

Information

For retrofitted original Volkswagen ball couplings or ball couplings offered by Volkswagen Genuine Accessories, trailer stabilisation can be activated in the vehicle. Please contact your Volkswagen Commercial Vehicles partner. The lighting unit on the trailer or carrier also works without activation.

2.8 Raising the vehicle

1. With lifting platforms

The vehicle is only allowed to be raised at the lifting points provided. Refer to the corresponding repair manual for information about the lifting points

2. With a jack

See the owner's manual for the procedure and jacking points on all vehicle variants

3 Modifications to closed bodies

3.1 Interior

The following points shall be observed without fail for conversions:

The driver and front passenger airbag units, the airbags and the belt tensioners are pyrotechnical objects.

Their handling, transport and storage are subject to legislation on potentially explosive substances, and the responsible public authority or government agency must therefore be notified. Purchase, transport, storage, installation and removal as well as disposal are only allowed to be performed by trained personnel in accordance with the corresponding safety regulations.

Modifications in the cockpit area and above the shoulder line shall be conducted in accordance with the criteria of the head impact tests acc. to UNECE-R 21. This applies in particular to the deployment zones of airbags (wooden trim, additional installations, mobile telephone retainers, bottle holders etc.).

Painting or surface treatment of the dash panel, steering wheel impact absorber and the tear seams of the airbags is not permitted.

The permitted centre of gravity position and axle loads are not allowed to be exceeded.

The interior fitting-out shall be configured with soft edges and surfaces.

Installations shall be manufactured from flame-retardant materials, and be firmly installed.

Unhindered access to the seats shall be guaranteed.

No projecting parts, corners or edges that could cause injuries are allowed to be located in the area of the seats.

3.1.1 Safety features

Warning note

In case of interventions by the converter in the structure of the vehicle, such as

- Modifications to the seats and consequently altered kinematics of the occupants in case of a crash
- Modifications to the front body
- Installations of parts in the vicinity of the exit openings and the deployment range of the airbags (see Owner's Manual of the vehicle)
- Installation of third-party seats
- Modifications to the doors

the safe function of the front airbag, side airbag and belt tensioners is no longer guaranteed. This could result in personal injuries.

Vehicle components that cause vibration must not be assembled near the airbag control unit or the sensors.

Modifications to the floor structure in the area of the airbag control unit or the satellite sensors are also unauthorised.

The Multivan is equipped with head and thorax airbags in the 1st row of seats in all equipment lines.

In the second and third rows of seats, curtain airbags and seat belts are installed in the standard equipment for all vehicles.

Important:

Please note that deactivation of the side airbag causes the airbag warning light in dash panel to light up continuously. Information about the deployment zones of the airbags can be found the vehicle Owner's Manual.

3.1.2 Retrofitting seats**3.1.2.1 Installation of standard seats**

- The strength data for seats available ex works is only valid in conjunction with the series attachment system
- When installing seat belts and belt locks, only Volkswagen genuine parts must be used

Retrofitting of standard seats in the passenger compartment

When retrofitting standard seats, make sure that the added seats are entered in the registration documents. Only the number of seats that have been ordered are documented in the registration documents after production of the vehicle. A belt system for the maximum number of standard seats is fitted in the vehicle for all equipment lines.

Seat position detection:

The seat position detection for retrofitted series seats must be coded in the instrument cluster.

Warning note

When the seat belts and seats are re-fitted, the prescribed bolts must be used and tightened to the original torque. You will find detailed information on torques in the Workshop Manuals.

Only fit seat covers or protective covers that are expressly approved for use in the vehicle.

Otherwise, the side airbag in the 1st row of seats cannot unfold optimally if triggered and therefore cannot protect the occupants optimally.

Information

Volkswagen AG repair and workshop information can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):

<https://volkswagen.erwin-store.com/erwin/showHome.do>

Or contact your Volkswagen Commercial Vehicles partner.

*Information system from Volkswagen AG, subject to payment

3.1.2.2 Installation of aftermarket product seats or use of standard seats deviating from the standard seating

As an alternative to retrofitting standard seats in accordance with [chapter 3.1.2.1](#), seats can also be installed subject to the following conditions:

- A seat deviating from the standard seating must be equipped with 3-point belts. Seat units without seat belts, or with two-point belts are not permitted
- Seats and safety belts and their fastenings must be tested or approved in accordance with the laws, directives and approval regulations that apply in the countries of registration
- It is essential not to exceed the height of the centre of gravity (H-point) when retrofitting seats. (see definition of H-point as per VW 80310). Refer to the build dimension drawings for more information and current documentation regarding the position of the H-point
- When installing seat belts and seat belt buckles other than those available from the factory, make sure that all regulations relevant to approval are complied with (please also refer to [chapter 2.4.2.1 "Belt anchors"](#))

Warning note

Seats must not be attached to the wheel housing. This also applies to wheel housings that are lowered. Otherwise damage could be caused to the vehicle (e.g. wheel housing and tyres) and accidents could result.

If seats other than those available from the factory are installed with factory seat belts, only belt locks that fit with the buckles on the factory seat belts may be used.

Otherwise the seat belt cannot be locked in the belt lock as intended and persons could be injured in the event of an accident.

Practical note

Modifications to the original series production condition can result in the withdrawal of type approval.

Country-specific laws, directives and approval regulations shall be observed!

Practical note

According to UN R 16, seat belt warning devices are mandatory for all seats. When retrofitting seat systems, the converter must ensure that this warning device is also installed for the retrofitted seat systems.

4 Implementations of special installations

4.1 Vehicles for transporting persons with restricted mobility

A wide range of driving aids for disabled persons, catering to persons with various disabilities, is available as optional equipment from Volkswagen AG. For more information, please contact your Volkswagen dealership.

Information

For more information, refer to the Volkswagen AG website at:

<https://www.volkswagen-nutzfahrzeuge.de/de/branchenloesungen-und-gewerbekunden/branchenloesungen/menschen-mit-behinderung.html>

4.1.1 Basic vehicle equipment

When planning the special vehicle, select the equipment of the basic vehicle according to the requirements of the future application (see also [chapter 1.3.1 "Selecting the basic vehicle"](#)).

Please note that certain conversions are only allowed to be used by people with corresponding entries in their driving licence.

Practical note

For ease of implementation, we recommend also ordering the customer-specific function control unit (CFCU*) with converter programming.

Further information can be found in [chapter 2.5.3 "Electrical interface for special vehicles"](#).

*CFCU: customer-specific functional control unit, see also [chapter 2.5.3.2](#).

4.1.2 Selection of steering rack for conversions for people with disabilities

In addition to the standard power steering (PR number 1N3), Volkswagen offers the T7 with power steering with mobility aid (PR number 1N5) as special equipment.

The power steering is given a lower steering torque by setting a different mobility characteristic. This has an effect particularly at relatively slow vehicle speeds (parking, urban driving).

4.1.3 Notes on conversion solutions for the wheelchair transporter

- If the routing of the exhaust system is modified or if sections of the pipe are cut out, it must be ensured that clearances to other components are adequate even when the exhaust system expands at operating temperature, and that touching is avoided
- The general certificate of roadworthiness of the whole vehicle will be invalidated if the exhaust system is modified. The wheelchair transporter is classified as a “special purpose” vehicle, which means the approval for the whole vehicle is retained. If a modified rear silencer is used, it is only necessary to provide verification of the noise level during “driving past at accelerated speed” for the vehicle
- If modifications are made to the exhaust system and the fuel system, it is necessary to ensure adequate protection against fire by fitting heat shields
- If the rear end is converted in order to create a flat loading ramp for driving the wheelchair in easily, sufficient ground clearance in the rear area must be ensured in order that an adequate exit angle can be achieved (e.g. ferry, multi-storey car park) with the permitted rear axle load
- Any PDC sensors must remain in their original position and function as in the production vehicle

4.1.4 Notes on installing manual operating devices for the foot brake

- Do not modify the brake pedal when installing manual operating devices. Select a clamped solution for connecting the manual operating device
- The operating travel of the manual operating device must also be sufficient for a blocking braking, with reserve travel for a circuit failure
- If a manual operating device is used for the accelerator and brake, the standard pedals must be covered by suitable means

4.1.5 Deactivating airbags / belt tensioner systems

The customer service workshop can also deactivate/reprogram the driver airbag/belt tensioner in exceptional cases – e.g. for drivers with a disability (with entry in the driving licence), if there is insufficient distance to the steering wheel or if a smaller steering wheel for wheelchair users is fitted (self-drive) and no airbag can be installed. For more information, please contact Volkswagen customer service.

The following points should be observed when deactivating airbag/belt tensioner systems:

1. The registration document for airbag/belt tensioner systems issued by the authorised repairer must be stored in the vehicle wallet and handed over to the next owner on sale of the vehicle
2. A warning sticker indicating deactivation must be affixed to the dash panel in a clearly visible position and must not be removed until the airbag is reactivated
3. Alterations to/deactivations of functions (airbag, belt tensioner, seat-occupied sensor etc.) must be entered immediately in the vehicle documents (TÜV, DEKRA, responsible technical service)
4. Other users/purchasers of the vehicle must be informed that the specified safety systems have been deactivated and of the increased safety risk this entails
5. We strongly recommend that deactivated airbags/belt tensioner systems are reactivated by an authorised repairer before the vehicle is sold. This applies in particular if the vehicle is sold or permanently transferred to persons who do not fulfil the requirements for airbag deactivation

Warning note

Deactivation means that the additional safety function of the airbag/belt tensioner is no longer ensured. Accidents may result in more severe injuries than those in which the airbag/belt tensioner is activated. Vehicle occupants have a greater risk of injury.

Practical note

Please note that permanently deactivating or removing the driver airbag also invalidates the belt unit type approval (belt tensioner, belt retractor). If an airbag is deactivated, the corresponding belt unit (for systems without airbags) must always also be adapted.

Follow the procedure for deactivating airbags specified in the workshop manual (see General body repairs, interior, repair group 1.8 Airbag deactivation and repair group 69 Passenger protection).

You can find the Workshop Manual on the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):

<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

Special information for deactivating side airbags (replacing driver seat with disability seat):

1. In Germany, the second regulation (2.SprengV) of the Explosives Act (SprengG) applies to the storage and preservation of seats with side airbags. Customers who wish to store removed seats at their homes must first clarify the requirements for private storage with the responsible trade supervisory board
2. To store a removed seat, a safety plug must be fitted on the detached cables

Please also comply with the following chapters during your conversion:

- [1.3.1 Selecting the base vehicle](#)
- [2.2.1 Permitted weights and kerb weights](#)
- [2.3.2 Modifications to the body-in-white](#)
- [2.5.2.1 Electrical wiring/fuses](#)
- [2.5.2.3 Retrofitting electrical devices](#)
- [2.5.3 Electrical interface for special vehicles](#)
- [2.5.4 Vehicle battery](#)
- [2.5.5 Retrofitting of alternators](#)
- [2.6.3 Fuel system](#)
- [2.6.4 Exhaust system](#)
- [3.1.1 Safety features](#)

4.2 Taxi / private hire car

4.2.1 Preparation ex works for taxis and private hire cars

The following setups are available ex works with PR numbers:

- Taxi setup without provision for radio (PR number F4E)
- Private hire car setup without provision for radio (PR number F5P)

The IP1 interface is the content of the F4E and F5P equipment.

Additional taxi equipment, such as roof sign provisions and taxi alarm, are available for the German market.

4.3 Plug-in hybrid electric vehicle (PHEV)

4.3.1 High-voltage system

The high-voltage system consists of the following components:

- High-voltage battery
- Power electronics
- Electric motor
- High-voltage air conditioner compressor
- High-voltage battery charging unit
- High-voltage battery charging socket
- Orange-coloured high-voltage wires and connectors
- High-voltage heater

All work carried out on the high-voltage system must be performed exclusively by a qualified workshop deploying suitably qualified and trained staff in accordance with Volkswagen's policies.

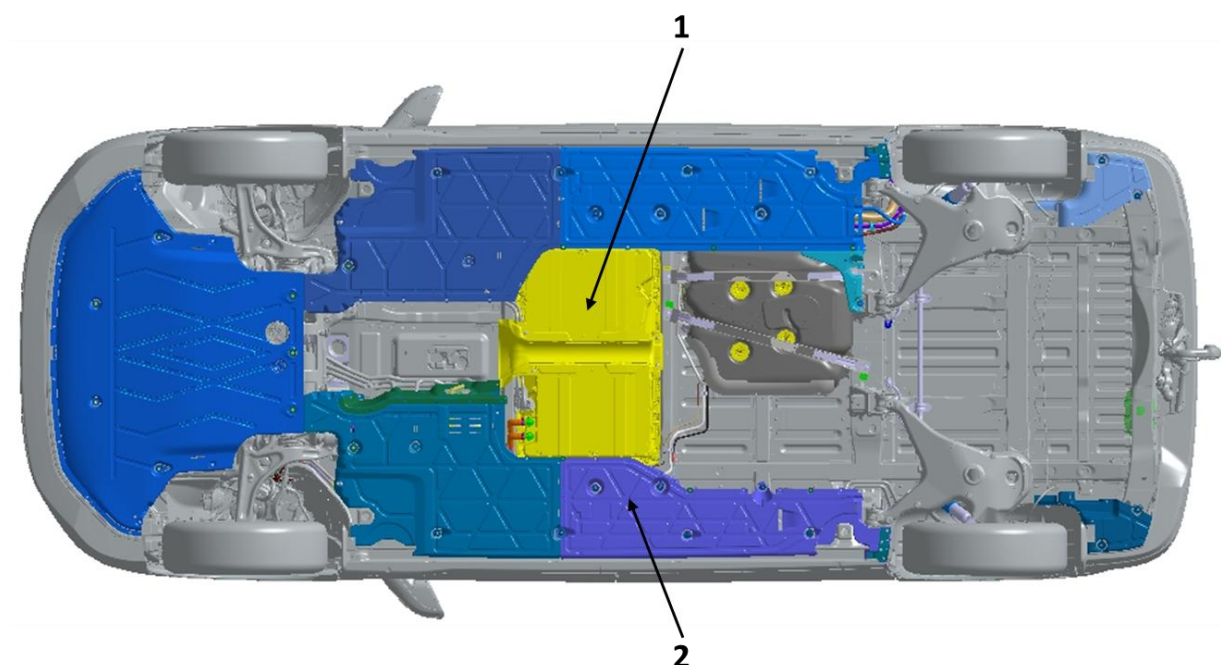


Fig. 1: Bottom view of high-voltage battery position

1 – lithium-ion high-voltage battery

2 – underbody cladding

Practical note

Modifications to the electric drive system are not permitted. Solutions regarding engine speed control are not possible. Modifications to the cooling system (radiator, air intake, air ducts etc.) are not permitted. Cooling air inlet surfaces must be kept clear.

Warning note

Special safety notes must be observed when working on electric vehicles. Failure to observe safety notes can result in a fatal electric shock.

Information

The required safety notes can be requested. Please contact us (see [chapter 1.2.1 “Product and vehicle information for converters”](#)).

Warning note

Modifications to the electrical drive system can lead to the system ceasing to function properly. Control of the vehicle may be lost.

Warning note

The voltage within the high-voltage vehicle electrics and high-voltage battery is life-threatening!

Touching damaged orange-coloured high-voltage wires and high-voltage battery may result in a fatal electric shock. The high-voltage system may also be active even if the ignition is switched off.

- Never carry out any work on the high-voltage vehicle electrics, orange-coloured high-voltage wires, high-voltage components or high-voltage battery. Work on the high-voltage system may only be performed by qualified specialist companies with appropriate accreditation to perform such work
- Never modify, damage, dismantle or disconnect from the high-voltage system any of the orange-coloured high-voltage wires, high-voltage components or high-voltage battery
- Work in close proximity to high-voltage components, high-voltage wires or high-voltage battery using machining, deforming or sharp-edged tools or heat sources, such as welding, soldering, hot-air or thermal bonding, may only be carried out if the voltage has been disconnected beforehand. The high-voltage battery cannot be de-energised. The high-voltage disconnection may only be performed by suitably qualified and trained specialist staff
- If there is a fault in the high-voltage system, the drive is automatically deactivated where necessary, and a corresponding indicator may be displayed in the instrument cluster. Should this be the case, the drive will remain deactivated until the fault has been rectified by suitably qualified and trained specialist staff
- The Volkswagen guidelines must be observed when carrying out any work on the high-voltage system, in particular on the orange-coloured high-voltage wires, high-voltage components or high-voltage battery

4.4 Multivan for converters

Vehicles ordered as “Multivan with pop-up roof for converters PR number Z3J” are described with the following equipment details.

- Incomplete M1 homologation
- Available as left-hand drive and right-hand drive vehicle
- L2 (long overhang)
- All engines are possible
- With a manual pop-up roof
- With swivel seats for driver and front passenger
- No floor and no rails in the passenger compartment
- Optional floor covering with rails (1)
- Without seats in the passenger compartment
- With side trims in the passenger compartment
- Without seat belts, including belt tensioners in the passenger compartment
- Interface for external use PR number IS2
(CFCU with configuration as required by the converter)

(1) Additional equipment with PR number P3J available as an option. This package also includes the PR number “5BG” floor covering with step-reinforced velour carpet including the rail system with six seat rails (see figure 1 below) mounted in the vehicle interior. The floor covering is a carry-over part from the Multivan model.

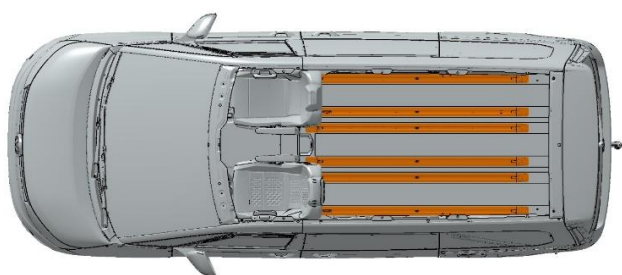


Fig. 1: Multivan for Converters (PR number Z3J), view from above without pop-up roof.

Practical note

The truck from the OEM factory may only be moved for loading/unloading, but not used for testing and transfer trips. The reason for this is the not yet exact setting values of the running gear.

Practical note

The installed seat rails supplied with the vehicle have been tested and approved in conjunction with Volkswagen Genuine seat systems. The converter is responsible for all alternative seat systems mounted on the seat rails, other installations and any alternative uses of the seat rails. This applies to the applicable approval regulations, operational safety and durability.

Practical note

The vehicles are equipped with curtain airbags in the vehicle interior. When viewed in the direction of travel, only in the driver's area on the left-hand side. On the right-hand side, for the passenger and the entire vehicle interior. The following details must be observed for installations in the vehicle interior:

- On the left-hand side, installations up to the roof line are possible. There is no curtain airbag installed between the B/D-pillar. It is not permitted to install a seating system on the left-hand side directly next to the side trim!
- Seat systems can be installed on the right-hand side. Due to the deployment zone of the curtain airbag, fixed installations are only possible up to the heights of the lower window line (window sill).



Fig. 2: schematic diagram for possible installations in the vehicle interior.

Information

The curtain airbag mounted on the right-hand side of the vehicle interior cannot be deactivated in sections.

Information

Vehicles ordered with PR number Z3J will receive an incomplete M1 homologation. After conversion and acceptance by technical service, approval must be carried out in the second stage.

Information on ride height and running gear components**Ride height**

Various standard weight classes are specified by the OEM for the Multivan vehicle variants (see table below!)

The vehicles are delivered as incomplete vehicles with running gear components of the weight class 0YD. Due to the still incomplete conversion (weight increase), the ride height does not correspond to the values entered in the homologation. The actual ride height can only be determined after removal. In order to achieve the OEM-configured ride height after conversion, it may be necessary to replace running gear components. To determine the appropriate running gear components, please use Tables 1 and 2 below. If the running gear components offered by Volkswagen are fitted, the ride height defined in the base vehicle can be implemented. The actual axle loads of the converted vehicle are important for the selection of components.

Information

When refitting the running gear components, the contents of the Workshop Manual must be observed.

Configuration of the front axle/rear axle suspension springs in relation to the axle loads of the converted vehicle (without driver + fuel tank with 6 litre capacity)

Configuration of the coil springs/damper strut on the front axle

Front axle weight *	1017	1078	1138	1189	1258
Range from/to (kg)	1077	1137	1188	1257	1317
Spring	7T0.411.105.C	7LA.411.105	7LA.411.105.A	7LA.411.105.B	7LA.411.105.C
Colour coding	1xgrau/3xgrün	1xwhite	1xgrey	2xgrey	3xgrey
Damper leg	7T0.413.031.AH			7T0.413.031.AL	

Table 1: Coil spring/damper strut assignment on the front axle

*Fuel tank with 6-litre capacity without driver

Configuration of the coil springs/shock absorbers on the rear axle

Rear axle weight *	746	836	912	974	1046	1148	1268
Range from/to (kg)	835	911	973	1045	1147	1267	1328
Spring	7T0.511.115.Q	7T0.511.115.R	7T0.511.115.S	7T0.511.115.T	7T0.511.115.AA	7T0.511.115.N	7T0.511.115.P
Colour coding	1xpink	2xpink	3xpink	4xpink	3xrosa/1xblau	4xyellow	3xgelb/1xgrün
Shock absorber	7T0.513.029.AA					7T0.513.029.S	

Table 2: Configuration of coil springs/shock absorbers on the rear axle

* Fuel tank with 6-litre capacity without operator

Check dimensions for the axle position of the converted vehicle (without driver + fuel tank with 6 litres capacity)

(measured perpendicular from the wheel centre to the wheel housing after run-in. Mean value from right and left side)

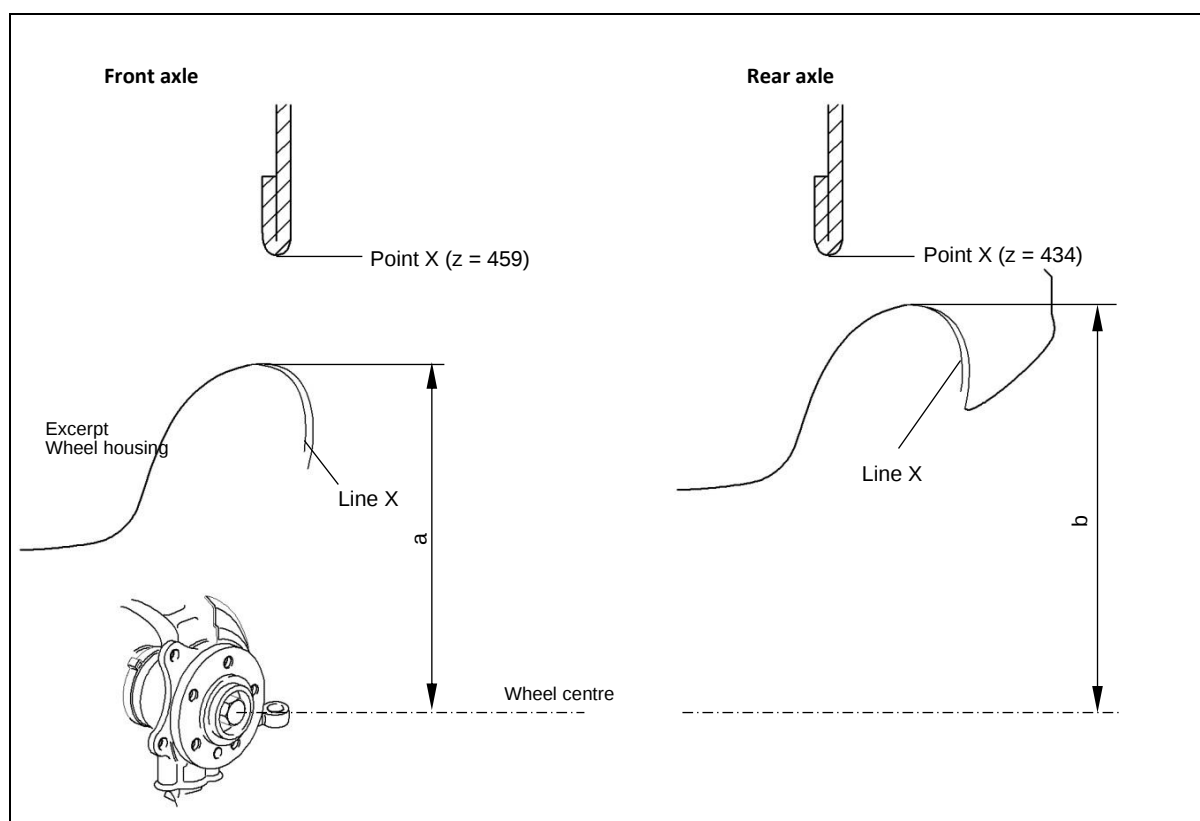


Fig. 3: control dimensions for axle position when the vehicle is empty (without driver + fuel tank with 6-litre capacity) Adjustment values for ride height

Front axle Rear axle

Damping	Body	Ride height a ₁
1BA (standard)	Multivan for converters	439 +13 - 7

Damping	Body	Ride height b
1BA (standard)	Multivan for converters	432 ± 10

1) Tolerance for the customer ±10

Wheel alignment:**Practical note**

After the modification, the settings of the running gear must be made exactly before commissioning and acceptance by the Technical Service. The individual values are shown in the following tables. Please note the information in the Workshop Manual.

Define the Multivan axle setting or control values for converters**Front axle**

Component	Multivan for converters
Suspension/damping	1BA
Toe-in on the wheel	5' ± 5'
Total toe	10' ± 10'
Camber on the wheel	-45' ± 30'
Camber difference left/right	Max. 1°
Caster on the wheel	4°10' ± 40'
Left/right caster	Max. 1°
Relative to vehicle tilt	0°

Rear axle

Component	Multivan for converters
Suspension/damping	1BA
Toe-in on the wheel	10' ± 5'
Total toe	20' ± 10'
Camber on the wheel	-1°10' ± 45'
Camber difference left/right	Max. 1°

Assist systems

After delivery from the OEM factory, the assistance systems are not yet precisely calibrated.

Practical note

Caution: Malfunctions and illogical error messages may occur before calibration. Once the installations have been completed, the following assistance systems must be checked and calibrated.

- Front camera for driver assist systems
- Topview eEntry
- RVC eSmart
- RVC eCompact
- Up to 28/25 rear radars, Entry
- Front radar (MRR)

5 Technical data

5.1 Dimension drawings

Please refer to our build dimension drawings for the dimensions of the Multivan.

They are available for download in DXF, TIFF and PDF format at the Customized Solution portal of Volkswagen AG. All files (except PDFs) are packed as Zip archives. The files can be unpacked using Winzip (PC) or Ziplt (MAC).

Information

Current build dimension drawings are available for downloading from the CustomizedSolution portal of Volkswagen AG under the “Technical drawings” menu item.

5.2 Diagrams (foil templates)

Vehicle views of the Multivan in 1:20 scale are available for download in TIF, DXF and EPS format to help you create diagrams. All files are packed as Zip archives. The files can be unpacked using Winzip (PC) or Ziplt (MAC).

Information

Current diagrams are available for downloading from the CustomizedSolution portal of Volkswagen AG under the “Foil templates” menu item.

5.3 Current flow diagrams

For detailed information about this topic, refer to the Workshop Manuals and current flow diagrams of Volkswagen AG.

Information

Volkswagen AG Workshop Manuals and current flow diagrams can be downloaded from the Internet at **erWin*** (Electronic Repair and Workshop Information from Volkswagen AG):
<https://volkswagen.erwin-store.com/erwin/showHome.do>

*Information system from Volkswagen AG, subject to payment

5.4 CAD models

As a registered converter, you can receive 3-D data models in the formats CATIA V.5 and STEP for design purposes.

Information

The available 3D data can be found on the CustomizedSolution portal of Volkswagen AG under "Technical information/CAD data"*.

*Registration required.

6 Weights (masses)

When ordering your vehicle, please note that the kerb weight increases when additional equipment is selected and the available payload capacity is therefore reduced.

Due to the continual changes to the base vehicle, all vehicle weights are available via the country-specific sales documents on the Internet or via the CustomizedSolution portal (www.customized-solution.com).

We recommend determining the definitive kerb weight of the entire vehicle by weighing before the conversion.

For further questions, please contact your Volkswagen Commercial Vehicles dealer, your importer or our Customer Care ([see chapter 1.2.1.1 "Contact in Germany"](#), [1.2.1.2 "International contact"](#)).

Practical note

For vehicle earth/dimensions, the following weight tolerances apply:

- 3% for vehicle classes M/N (excluding vehicles for special purposes)
- 5% for vehicles with special intended use

7 Notes on homologation of equipping and conversions

7.1 Availability with a Certificate of Conformity for a complete vehicle ex works – EU 6EA/6EB light duty WLTP



Applies to	Multivan
Drive type:	Front and all-wheel (PHEV)
Body	Closed
Type of homologation:	Light duty
WLTP calculator:	Calculation of conversions with the WLTP calculator possible
Calculable dimensions:	Vehicle mass in ready-to-drive state

Information

Valid for the approved engine-gearbox variants (see offer for countries).

The max. values depend on the drive/weight combination.

Information

For all vehicles/engine-gearbox variants for which no values can currently be generated using the WLTP calculation tool, please contact your responsible technical service and check whether individual approval or multi-stage type approval is possible.

8 List of changes

Changes to the converter guidelines compared to the data status of November 2024.

Chapter no.	Chapter heading	Scope of change
1	General information	
1.1	Introduction	
1.1.1	Concept of this Owner's Manual	
1.1.2	Means of representation	
1.1.3	Vehicle safety	
1.1.4	Operational reliability	
1.1.5	Note on copyright	
1.2	General information	
1.2.1	Product and vehicle information for converters	
1.2.1.1	Contact in Germany	
1.2.1.2	International contact	Link updated
1.2.1.3	Electronic Repair and Workshop Information from Volkswagen AG (erWin)	Link updated
1.2.1.4	Genuine Parts Online Ordering Portal	
1.2.1.5	Online Owner's Manual	
1.2.1.6	European Type Approval (ETA) and EC Certificate of Conformity (CoC)	
1.2.1.7	Worldwide Harmonised Light Vehicles Test Procedure (WLTP)	
1.2.1.8	Amendments to legislation from 1 January 2022 Regulation (EU) 2018/858 EU and national (Art. 44 and Art. 45)	
1.2.1.9	Manufacturer's declaration	Chapter updated
1.2.2	Converter guidelines, consulting	
1.2.2.1	Letter of non-objection	
1.2.2.2	Application for the letter of non-objection	
1.2.2.3	Legal entitlements	
1.2.3	Warranty and product liability of the converter	Chapter updated
1.2.4	Ensuring traceability	
1.2.5	Badges	
1.2.5.1	Positions on rear of the vehicle	
1.2.5.2	Appearance of whole vehicle	
1.2.5.3	Non-Volkswagen badge	
1.2.6	Recommendations for vehicle storage	
1.2.7	Compliance with environmental rules and regulations	
1.2.8	Recommendations for inspection, maintenance and repair	
1.2.9	Accident prevention	
1.2.10	Quality system	
1.3	Planning bodies	
1.3.1	Selecting the basic vehicle	
1.3.2	Vehicle modifications	
1.3.3	Vehicle acceptance	
1.4	Special equipment	
2	Technical data for planning	
2.1	Basic vehicle	
2.1.1	Vehicle dimensions	

Chapter no.	Chapter heading	Scope of change
2.1.1.1	Multivan basic data	
2.1.2	Ramp angle and breakover angle	
2.2	Running gear	
2.2.1	Permitted weights and kerb weights	
2.2.2	Turning circle	
2.2.3	Approved tyre sizes	
2.2.4	Modifications to axles	
2.2.5	Modifications to the steering system	
2.2.6	Brake system and brake control system ESC*	
2.2.6.1	General information	
2.2.6.2	Routing additional lines along the brake hoses/brake lines	
2.2.7	Modification of springs, suspension mounting, dampers	
2.2.8	Wings and wheel housings	
2.3	Body-in-white	
2.3.1	Roof loads	
2.3.1.1	Dynamic roof loads	
2.3.1.2	Static roof loads	
2.3.2	Modifications to the body-in-white	
2.3.2.1	Bolted connections	
2.3.2.2	Welding work	
2.3.2.3	Welded connections	
2.3.2.4	Selection of welding process	
2.3.2.5	Resistance spot welding	
2.3.2.6	Shielding gas plug welding	
2.3.2.7	Tacking	
2.3.2.8	Welding is not allowed	
2.3.2.9	Corrosion protection after welding	
2.3.2.10	Corrosion protection measures	
2.3.2.11	Planning measures	
2.3.2.12	Component design measures	
2.3.2.13	Coating measures	
2.3.2.14	Work on the vehicle	
2.4	Interior	
2.4.1	Modifications in the area of airbags	
2.4.2	Modifications in the area of seats	
2.4.2.1	Belt anchors	
2.4.3	Forced ventilation vent	
2.4.4	Acoustic insulation	
2.4.5	eCall Emergency System	
2.5	Electrical / electronic systems	
2.5.1	Lighting	
2.5.1.1	Vehicle lighting systems	
2.5.1.2	Adjusting headlights	
2.5.1.3	Special lights	
2.5.1.3.1	Rotating light, yellow light	
2.5.1.3.2	Roof-mounted turn signals	

Chapter no.	Chapter heading	Scope of change
2.5.2	Electrical system	
2.5.2.1	Electrical wiring/fuses	
2.5.2.2	Additional circuits	
2.5.2.3	Retrofitting electrical devices	
2.5.2.4	Electromagnetic compatibility	
2.5.2.5	Mobile communication systems	
2.5.2.6	CAN bus	Chapter updated
2.5.2.7	Current and signal take-off of vehicle electrical system potentials	
2.5.3	Electrical interface for special vehicles	
2.5.3.1	General information on the interface for special vehicles	
2.5.3.2	Customer-specific functional control unit (CFCU)	
2.5.4	Vehicle battery	
2.5.5	Retrofitting of alternators	
2.5.6	Driver assist systems	Chapter updated
2.5.6.1	Parking aids	Chapter added
2.5.7	Earth points	
2.6	Engine peripherals/drive train	
2.6.1	Engine / drive train components	
2.6.2	Drive shafts	
2.6.3	Fuel system	
2.6.4	Exhaust system	
2.6.4.1	Exhaust system (MAR*)	
2.6.5	SCR system (EU6)	
2.6.5.1	Installation position of the AdBlue tank in the vehicle	
2.6.5.2	Filling opening of the AdBlue® tank	
2.7	Add-ons/units	
2.7.1	Roof carriers	
2.7.2	Towing brackets	
2.7.2.1	Maximum trailer weights	Chapter updated
2.7.2.2	Retrofitting a towing bracket	Information added
2.8	Raising the vehicle	
3	Modifications to closed bodies	
3.1	Interior	
3.1.1	Safety features	
3.1.2	Retrofitting seats	
3.1.2.1	Installation of standard seats	
3.1.2.2	Installation of aftermarket product seats or use of standard seats deviating from the standard seating	Factual information added
4	Implementations of special bodies	
4.1	Vehicles for transporting persons with restricted mobility	
4.1.1	Basic vehicle equipment	
4.1.2	Selection of steering rack for conversions for people with disabilities	
4.1.3	Notes on conversion solutions for the wheelchair transporter	
4.1.4	Notes on installing manual operating devices for the foot brake	
4.1.5	Deactivating the airbag/belt tensioner system	
4.2	Taxi/private hire car	

Chapter no.	Chapter heading	Scope of change
4.2.1	Preparation ex works for taxis and private hire cars	
4.3	Plug-in hybrid electric vehicle (PHEV)	
4.3.1	High-voltage system	
4.4	Multivan for converters	Chapter updated
5	Technical data	
5.1	Build dimension drawings	
5.2	Diagrams (foil templates)	
5.3	Current flow diagrams	
5.4	CAD models	
6	Weights (masses)	
7	Notes on homologation of equipping and conversions	
7.1	Availability with a Certificate of Conformity for a complete vehicle ex-works – EU 6EA/6EB light duty WLTP	Heading updated
8	List of changes	
Last page	Address, mailroom slot	

Converter guidelines

The Multivan

Converter guidelines

Subject to change without notice

July 2025 edition

Internet:

<https://www.volkswagen-nutzfahrzeuge.de>

<https://www.customized-solution.com>

Consulting for converters in Germany is available from the listed address.

Volkswagen Commercial Vehicles

Brieffach 2949

Postfach 21 05 80

D-30405 Hannover